

Residential AIR TO WATER

- W-002 WATERSTAGE™ Overview
- W-004 Benefits
- W-006 Home Heating & Domestic Hot Water
- W-008 High Efficiency Technology
- W-010 WATERSTAGE™ Lineup
- W-012 Split Type
 - **New** Comfort Series
 - Super High Power Series
 - High Power Series
 - Comfort Series
- W-020 Split DHW Integrated Type
 - **New** Comfort Series
 - Super High Power Series
 - High Power Series
 - Comfort Series
- W-028 Control Overview
- W-030 Comfort Control
- W-032 System Configuration
- W-034 Case Studies
- W-036 Simplified installation
Easy Installation & Maintenance
- W-038 Installation Limitations
- W-040 AIR TO WATER Optional Parts



WATERSTAGE™
Innovative Solution of Domestic Heating
SPLIT TYPE / SPLIT DHW INTEGRATED TYPE

AIR TO WATER
Residential



FUJITSU GENERAL LIMITED

WATERSTAGE™ Overview

Complete Solution meets various needs

The clean energy produced by WATERSTAGE™ reliably delivers "comfort" to all spaces in the home up to the living room, bedrooms, bathroom, and swimming pool.



30 Models


Fujitsu General WATERSTAGE™ Heat Pumps are very efficient, regenerative and varied central heating systems, which absorb the energy mainly from the air.




Optimization of refrigerant cycle operation

Super High Power and High Power model achieves high performance and efficiency by adopting twin sensors and control technology corresponding to hot water heating.

Split type

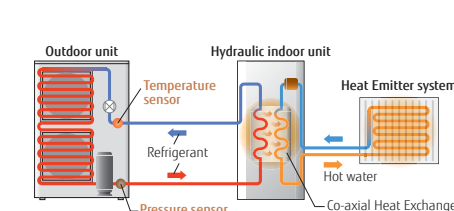


Split DHW Integrated type

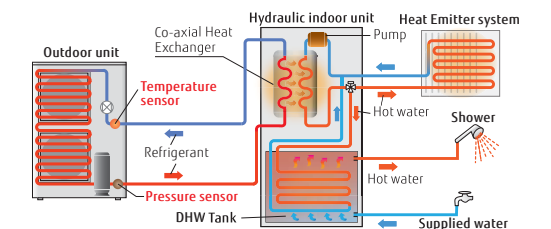

What's a Heat Pump ?


Absorbing free energy from the atmosphere. Heat Pump system requires only 1 kW of electricity to generate 3 to 5 kW thermal energy.

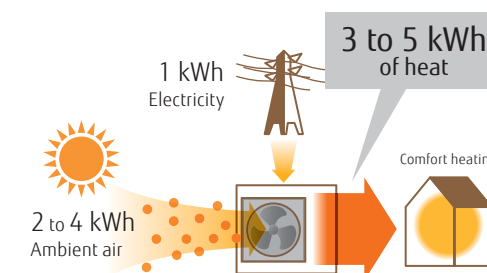

Primary Energy Usage Reduced Drastically!

Proportion of primary energy into heating energy of 100%

Primary Energy Consumption*

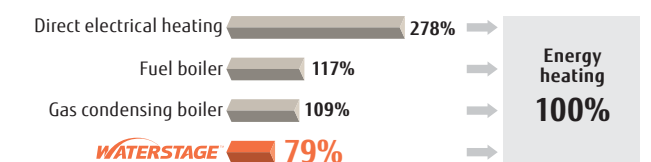


*Electricity loss is different due to power plant. Example efficiency of power plant: 36%

Benefits

Less CO₂ Emissions

This environmentally-friendly system substantially reduces CO₂ emissions compared to conventional gas and hydro carbons combustion.

Average annual CO₂ emissions

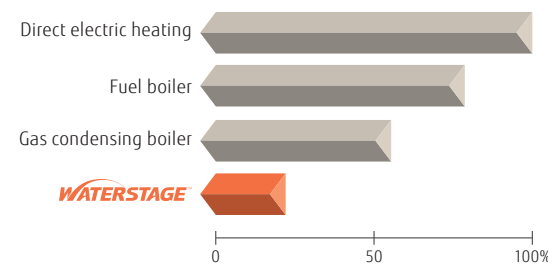


*Calculations based on data provided by European Program-2001¹ for EU 27
Fuel boiler efficiency: 89%, Gas boiler efficiency: 93%

Clean and Healthy

Since burners are unnecessary, NO_x and other harmful substances are not generated.


Environmentally friendly
heating system



Low Running Cost

Running cost is low and economical by high efficiency heat pump technology.

Average annual running cost

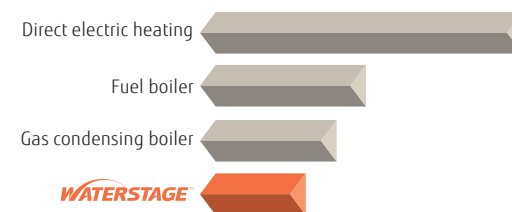

*The values may vary depending on installation, location, and operating conditions.

Easy Installation and Maintenance


All components are built into compact outdoor unit or hydraulic indoor unit.



Well structured Hydraulic indoor unit.

Sophisticated arrangement of hydraulic units, allows easy piping and maintenance

Energy Efficiency standard Product labels

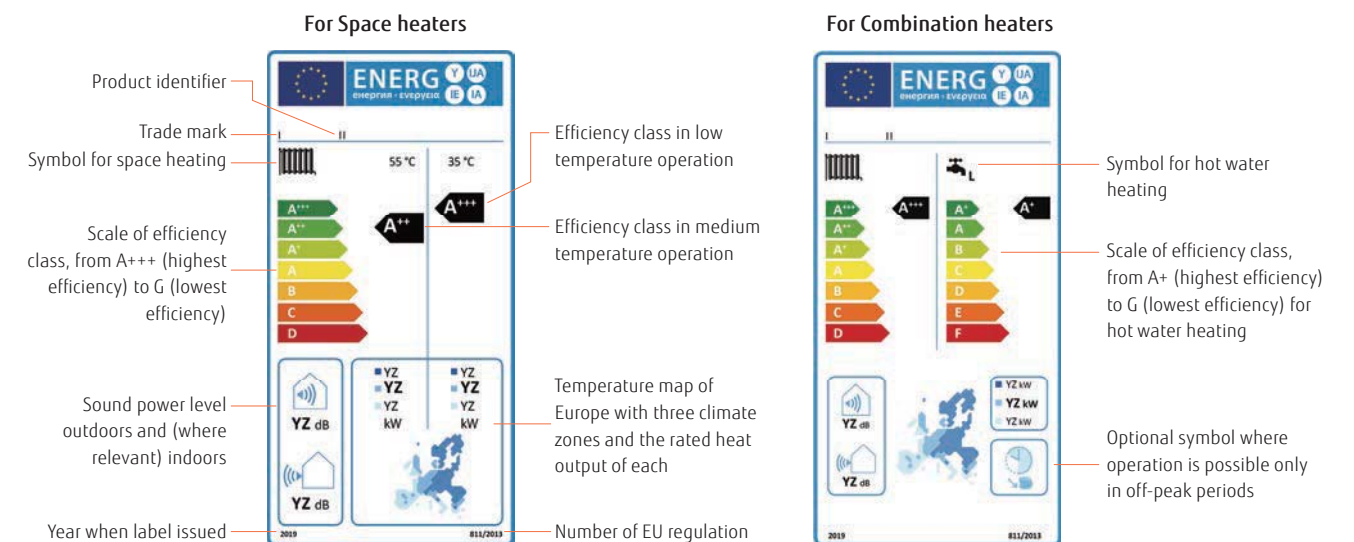

The Ecodesign Directive Lot 1 Regulation 813/2013

New Ecodesign directive defines a regulatory framework for improving the environmental performance of energy-related products (ErP) through design.

From 26 September 2015, the Ecodesign Directive will apply to space heaters (including heat pumps and fossil fuel boilers), combination heaters (for both space and water heating), water heaters and water storage tanks.

All these products will have to meet minimum requirements for energy efficiency^{*1} and maximum sound power levels. The minimum energy efficiency level will be raised from 26 September 2017 and maximum sound power level will be lowered on 26 September 2018.

*1: Energy efficiency is represented by seasonal space heating efficiency (η_s). This value is based upon the seasonal coefficient of performance (SCOP).

The Energy Labelling Directive (EU) No. 811/213

The energy label aims to help consumers make direct comparisons of energy use, as well as product specific features. On all labels, product identifier, efficiency class, sound power levels and heat output must be displayed. For heat generators, the scale runs from A+++ to D. There are two different product labels for space heaters and combination heaters.

Seasonal space heating Energy efficiency class

Except low temp HP 55°C	Low temp HP 35°C
A+++ η _s ≥ 150	η _s ≥ 175
A++ 125 ≤ η _s < 150	150 ≤ η _s < 175
A+ 98 ≤ η _s < 125	123 ≤ η _s < 150
A 90 ≤ η _s < 98	115 ≤ η _s < 123
B 82 ≤ η _s < 90	107 ≤ η _s < 115
C 75 ≤ η _s < 82	100 ≤ η _s < 107
D 36 ≤ η _s < 75	61 ≤ η _s < 100
E 34 ≤ η _s < 36	59 ≤ η _s < 61
F 30 ≤ η _s < 34	55 ≤ η _s < 59
G η _s < 30	η _s < 55

EHPA Quality Label



Fujitsu General's WATERSTAGE^{*2} have obtained the EHPA Quality Label^{*3} by tests according to the international Standards EN14511 and EN17025. The EHPA Quality Label^{*3} is a label that shows

the end-consumer a quality heat pump unit on the market.

*2: Only High Power 3 phase

*3: Check the validity of label at
www.ehpa.org/quality/quality-label/

SG-Ready Label



SG-Ready is a defined standard by BWP^{*4}, which makes it possible that the device can be integrated into a smart grid. Heat pumps, which are equipped with the SG-Ready Label, can receive signals from the power grid (and e.g. also from PV systems) about the available (unused renewable) energy (from wind, sun & water). Fujitsu General provides the SG-Ready compatibility to all new Heat Pumps Series.

*4: BWP = the Federal German Heat Pump Association

The CEN Heat Pump KEYMARK




The Heat Pump KEYMARK is a full certificate supporting the quality of heat pumps in the European market. The Heat Pump KEYMARK is a voluntary, independent, European certification mark (ISO type 5 certification) for all heat pumps, combination heat pumps and hot water heaters (as covered by Ecodesign, EU Regulation 813/2013 and 814/2013). Fujitsu General's WATERSTAGE^{*5} have obtained the KEYMARK^{*6}.

*5: Only R32 comfort model

*6: Check the validity of mark at www.heatpumpkeymark.com/about/

Home Heating & Domestic Hot Water

Wide range lineup suited for regional characteristics, family structure, and application. We provide various products to meet your needs from High Power via heating-centered series to reasonably-priced compact series.

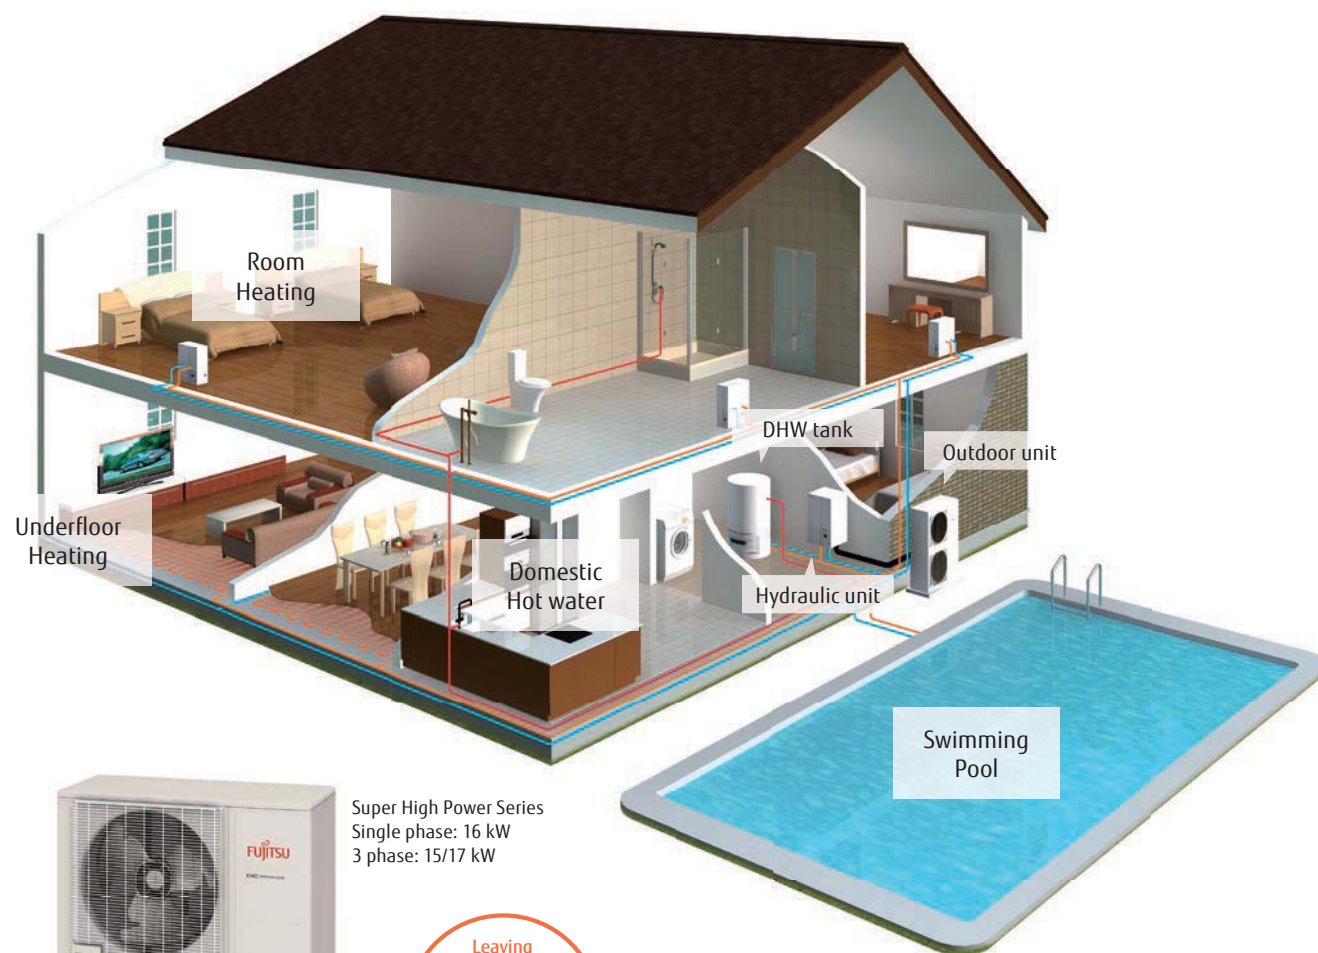

Super High Power Series
Single phase: 16 kW
3 phase: 15/17 kW

Leaving
water temperature
60°C

High leaving water temperature

High leaving water temperature 60°C maintained even at -20°C outdoor temperature without using backup heater.

For Room heating & domestic hot water

Outdoor unit and hydraulic indoor unit can be installed freely, so installation is easy. Since hydraulic indoor unit is installed inside a house, freezing of circulated water can be prevented. A larger heating capacity can be performed flexibly by using more units in cascade connection.*1

*1: For High Power only



Appearance-oriented compact outdoor unit

Split type Comfort Series

For Comfort Series, optimized flow temperature control is achieved by DC inverter technology.

*2: Outdoor Unit: WOYA060LFCA/WOYA080LFCA




+ DHW Tank

DHW tank (option) can be used to supply hot water by connecting it to the system.

+ Boiler

By combining existing boiler, powerful heating can be achieved even at low outdoor temperature.

*Optional parts necessary

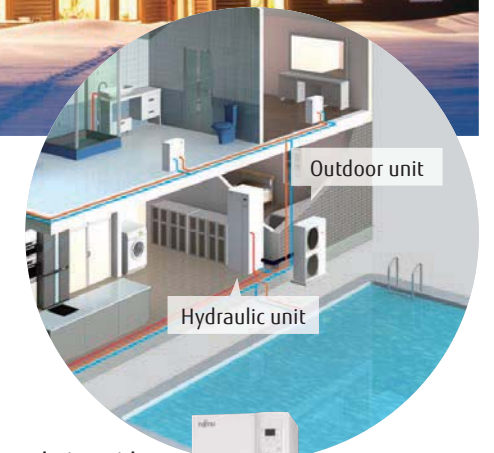


Stylish space saving solution with built-in DHW tank



Space is saved drastically due to built-in DHW tank.

Existing boiler can be replaced easily. Higher heating capacities can be achieved as there is the flexibility to use more units in a cascade type connection.

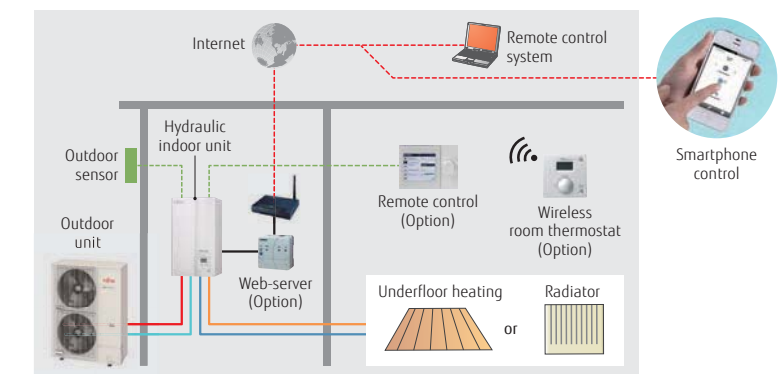

Smart control

User's needs are supported by offering a variety of controls, such as individual control and remote control options.

High Efficiency Technology


Twin Rotary Compressor




For Outdoor Unit

Twin Rotary Compressor with Linear Control Injection Port


The compressor achieves high condensing temperature without overheating the discharge gas temperature by Linear Control Injection process during compression. Therefore, the condensing temperature rises up higher than normal circuit. A higher hot water temperature is achieved by controlling the injection amount according to the usage state.

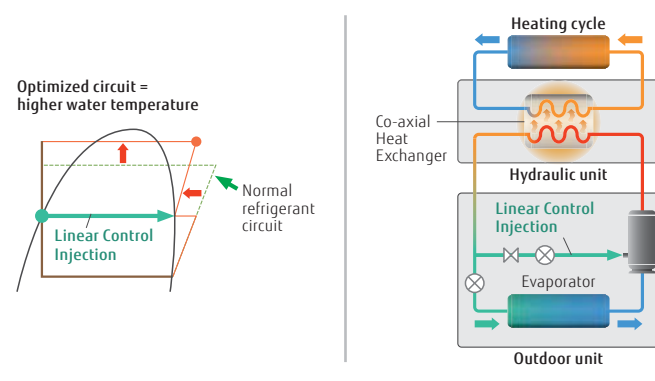

Accurate temperature control by DC inverter technology

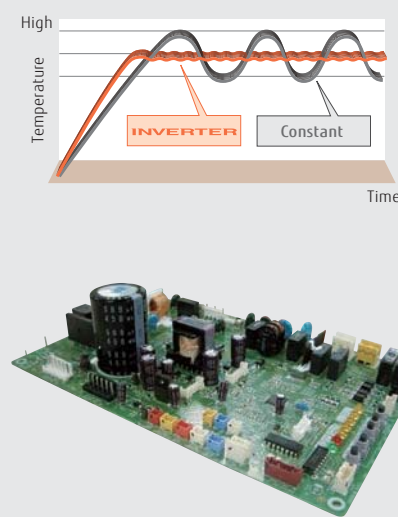

High Durability Co-axial Heat Exchanger

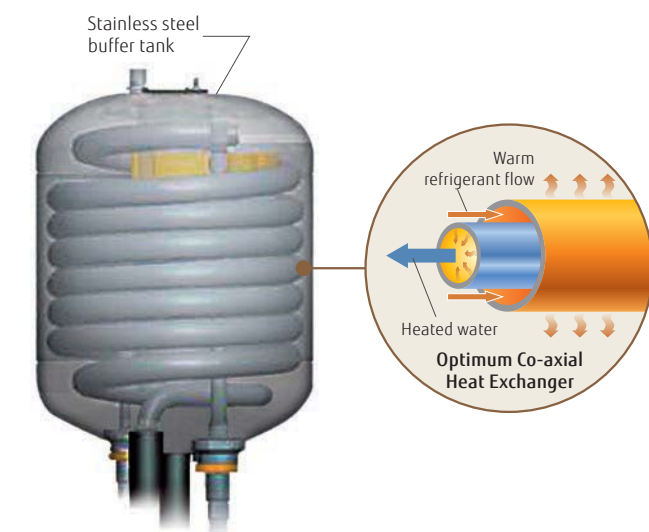

For Hydraulic Indoor Unit

Stainless steel buffer tank

Heat exchange amount is 25% higher than previous model. Energy saving performance is improved.

- Corrosion protected
- No flow switch necessary
- Anti-freeze-protection is unnecessary

Class A++ Pump

Energy saving pump with constant volume or pressure adjustment function.



Energy efficiency class WSK170DJ9



WATERSTAGE™ Lineup



Type	Split type						Split DHW Integrated type					
	Super High Power Series		High Power Series		Comfort Series		Super High Power Series		High Power Series		Comfort Series	
Hydraulic indoor unit												
Outdoor unit												
Capacity range	15/16/17 kW		11/14 kW 11/14/16 kW		5/6 kW 8 kW		15/16/17 kW		11/14 kW 11/14/16 kW		5/6 kW 8 kW	
System outline	<ul style="list-style-type: none">• 60°C hot water supply even at -20°C outdoor temperature• 55°C hot water supply even at -22°C outdoor temperature• Different heating system can be used. Like underfloor heating, radiators and others.*• Heating and DHW in one system.*• Additional electric heater for backup provided.• Up to two independent control circuits.*• Cooling operation is possible.*• Operation range is -25 to 35 °C.		<ul style="list-style-type: none">• 60°C hot water supply even at -20°C outdoor temperature• Different heating system can be used. Like underfloor heating, radiators and others.*• Heating and DHW in one system.*• Additional electric heater for backup provided.• Up to two independent control circuits.*• Cascade connection up to three systems.*• Cooling operation is possible.*• Operation range is -25 to 35 °C.		<ul style="list-style-type: none">• 55°C hot water supply even at -10°C outdoor temperature• Heating and DHW in one system.*• Additional electric heater for backup provided.• Up to two independent control circuits.*• Cooling operation is possible.*• Operation range is -20 to 35 °C.		<ul style="list-style-type: none">• 55°C hot water supply even at -10°C outdoor temperature• Different heating system can be used. Like underfloor heating, radiators and others.*• Heating and DHW in one system.*• Additional electric heater for backup provided.• Up to two independent control circuits.*• Cooling operation is possible.*• Operation range is -20 to 35 °C.		<ul style="list-style-type: none">• 60°C hot water supply even at -20°C outdoor temperature• 55°C hot water supply even at -22°C outdoor temperature• Different heating system can be used. Like underfloor heating, radiators and others.*• Heating and DHW space saving in one hydraulic indoor unit.• Additional electric heater for backup provided.• Up to two independent control circuits.*• Cooling operation is possible.*• Operation range is -25 to 35 °C.		<ul style="list-style-type: none">• 60°C hot water supply even at -20°C outdoor temperature• Different heating system can be used. Like underfloor heating, radiators and others.*• Heating and DHW space saving in one hydraulic indoor unit.• Additional electric heater for backup provided.• Up to two independent control circuits.*• Cooling operation is possible.*• Operation range is -25 to 35 °C.	
Power source	Single Phase, 230 V/50 Hz	3 Phase, 400 V/50 Hz	Single Phase, 230 V/50 Hz	3 Phase, 400 V/50 Hz	Single Phase, 230 V/50 Hz	Single Phase, 230 V/50 Hz	Single Phase, 230 V/50 Hz	3 Phase, 400 V/50 Hz	Single Phase, 230 V/50 Hz	3 Phase, 400 V/50 Hz	Single Phase, 230 V/50 Hz	Single Phase, 230 V/50 Hz
Capacity	5 kW				WSYA050ML3 WOYA060KLT	WSYA050DG6 WOYA060LFCA					WGYA050ML3 WOYA060KLT	WGYA050DG6 WOYA060LFCA
	6 kW				WSYA080ML3 WOYA060KLT	WSYA100DG6 WOYA060LFCA					WGYA080ML3 WOYA060KLT	WGYA100DG6 WOYA060LFCA
	8 kW				WSYA080ML3 WOYA080KLT	WSYA100DG6 WOYA080LFCA					WGYA080ML3 WOYA080KLT	WGYA100DG6 WOYA080LFCA
	10 kW					WSYA100DG6 WOYA100LFTA						WGYA100DG6 WOYA100LFTA
	11 kW		WSYG140DG6 WOYG112LHT	WSYK160DG9 WOYK112LCTA					WGYG140DG6 WOYG112LHT	WGYK160DG9 WOYK112LCTA		
	14 kW		WSYG140DG6 WOYG140LCTA	WSYK160DG9 WOYK140LCTA					WGYG140DG6 WOYG140LCTA	WGYK160DG9 WOYK140LCTA		
	15 kW		WSYK170DJ9 WOYK150LJL					WGYK170DJ9 WOYK150LJL				
	16 kW	WSYG160DJ6 WOYG160LJL		WSYK160DG9 WOYK160LCTA			WGYG160DJ6 WOYG160LJL		WGYK160DG9 WOYK160LCTA			
	17 kW		WSYK170DJ9 WOYK170LJL					WGYK170DJ9 WOYK170LJL				

*Optional parts are required.

NEW

Split Type


Comfort Series



High Leaving Water Temperature

Maximum leaving water temperature is 55°C without backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

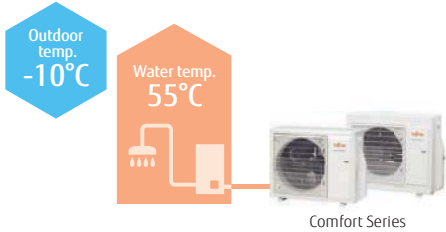

High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.


Energy efficiency class



*Temperature application : Heating Temp. 35°C.

Seasonal space heating energy efficiency (ηs)

Condition : Outdoor Temp. 7°C Heating Temp. 35°C.

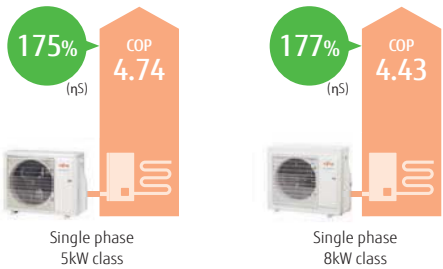

Outdoor unit technology



DC Fan Motor
High performance, high efficiency small DC fan motor mounted.



DC Twin Rotary Compressor
High efficient DC twin rotary compressor



DC Inverter
Smooth water temperature control realized by DC inverter control.

Hydraulic indoor unit:
WSYA050ML3 / WSYA080ML3
Outdoor unit:
WOYA060KLT / Woya080KLT



Hydraulic indoor unit
Single phase



Outdoor unit
Single phase
5/6kW



Outdoor unit
Single phase
8kW


Specifications

Model Name	Hydraulic indoor unit		WSYA050ML3		WSYA080ML3		WSYA080ML3	
Capacity range	Outdoor unit		WOYA060KLT		WOYA060KLT		WOYA080KLT	
7°C/35°C floor heating * ¹	Heating capacity	kW	5		6		8	
	Input power		4.50		5.50		7.50	
	COP		0.949		1.18		1.69	
2°C/35°C floor heating * ¹	Heating capacity	kW	4.74		4.65		4.43	
	Input power		4.50		5.30		6.30	
	COP		1.33		1.65		1.96	
-7°C/35°C floor heating* ¹	Heating capacity	kW	3.39		3.22		3.21	
	Input power		4.40		5.00		5.70	
	COP		1.59		1.90		2.13	
			2.76		2.63		2.68	
Space heating characteristics* ²								
Temperature application		°C	55	35	55	35	55	35
Energy efficiency class			A++	A+++	A++	A+++	A++	A+++
Rated heat output(P _{rated})		kW	5	5	5	6	6	7
Seasonal space heating energy efficiency(η _s)		%	125	175	125	175	128	177
Annual energy consumption		kWh	3,035	2,322	3,411	2,594	3,903	2,982
Sound power level* ³		Hydraulic indoor unit	40		40		40	
		Outdoor unit	57		57		60	
Hydraulic indoor unit Specification								
Power source			Single phase 230 V 50 Hz					
Dimensions H×W×D		mm	847 x 450 x 493		847 x 450 x 493		847 x 450 x 493	
Weight (Net)		kg	41		41		41	
Water circulation		Min/Max	L/min		7.6/22.0		8.5/22.0	
Buffer tank capacity		L	16		16		16	
Expansion vessel capacity		L	8		8		8	
Leaving water temperature range		Max	°C		55		55	
Water pipe connection diameter		Flow/Return	mm		Ø 25.4/Ø 25.4		Ø 25.4/Ø 25.4	
Backup heater		Capacity	kW		3.0		3.0	
Outdoor unit specification								
Power source			Single phase 230 V 50 Hz					
Current		Max	A		13.0		18.0	
Dimensions H × W × D		mm	632 x 799 x 290		632 x 799 x 290		716 x 820 x 315	
Weight (Net)		kg	39		39		42	
Refrigerant		Type (Global Warming Potential)	R32(675)		R32(675)		R32(675)	
		Charge	kg		0.97		1.02	
Additional refrigerant charge amount		g/m	25		25		25	
Connection pipe	Diameter	Liquid	mm		6.35		6.35	
		Gas	12.70		12.70			
	Length	Min/Max	m		3/30		3/30	
	Length(Pre-charge)	m	15		15			
	Height difference	Max	m		20		20	
Operation range		Heating	°C		-20 to 35		-20 to 35	


*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.
*2:All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/
*3:The values of sound power level are based on measurement of EN12102 standard under conditions of EN14825 standard.

Dimensions


Outdoor Unit:
WOYA060KLT

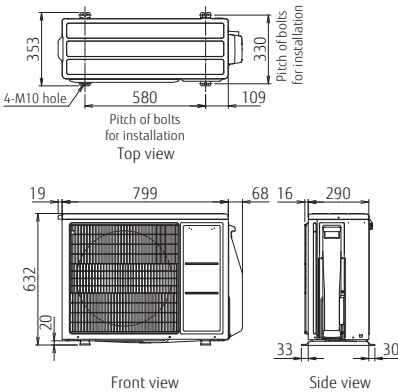

WOYA080KLT

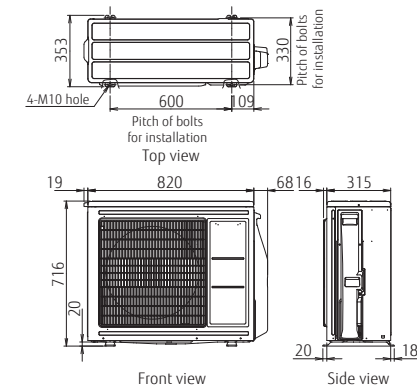

Hydraulic Indoor Unit:
WSYA050ML3/WSYA080ML3




Split Type
Super High Power Series



High Leaving Water Temperature

High leaving water temperature of 60°C is kept even when outdoor temperature is down to -20°C without using backup heaters. And it's possible to supply 55°C at -22°C outdoor temperature without backup heater.


* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

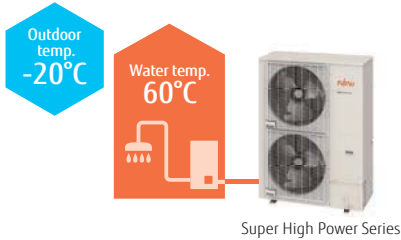

High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.

Energy efficiency class

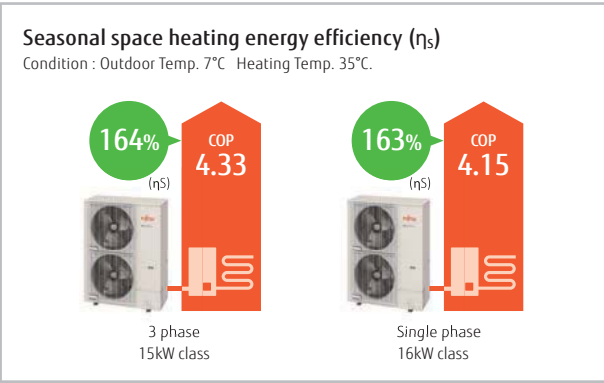

Extended Operation Range down to -25°C

Improved operation range down to -25°C outdoor temperature



Hydraulic indoor unit:
WSYG160DJ6 / [3 phase] WSYK170DJ9
Outdoor unit:
WOYG160LJL
[3 phase] WOYK150LJL / WOYK170LJL



Hydraulic indoor unit
Single phase/
3 phase



Outdoor unit
Single phase 16kW
3 phase 15/17kW


Specifications

Model Name		Hydraulic indoor unit		WSYG160DJ6		WSYK170DJ9		WSYK170DJ9	
Capacity range		Outdoor unit		WOYG160LJL		WOYK150LJL		WOYK170LJL	
7°C/35°C floor heating * ¹	Heating capacity		kW	16		15		17	
				16.00		15.00		17.00	
				3.86		3.46		4.10	
	COP		4.15		4.33		4.15		
13.30			13.20		13.50				
2°C/35°C floor heating * ¹	Heating capacity		kW	13.30		13.20		13.50	
				4.25		4.06		4.27	
				3.13		3.25		3.16	
	COP		14.50		13.20		15.00		
5.27			4.55		5.32				
-7°C/35°C floor heating* ¹	Input power		kW	2.75		2.90		2.82	
Space heating characteristics* ²									
Temperature application			°C	55	35	55	35	55	35
Energy efficiency class				A++	A++	A++	A++	A++	A++
Rated heat output(P _{rated})			kW	14	16	16	17	17	18
Seasonal space heating energy efficiency(η _s)			%	125	163	130	164	130	161
Annual energy consumption			kWh	8,757	8,014	9,915	8,606	10,232	9,059
Sound power level	Hydraulic indoor unit		dB(A)	45	45	45	45	45	45
	Outdoor unit			67	66	67	66	67	68
Hydraulic indoor unit Specification									
Power source			Single phase, 230 V 50 Hz			3 phase, 400 V 50 Hz			
Dimensions H×W×D			mm	805 × 450 × 471			805 × 450 × 471		
Weight (Net)			kg	52.5			52.5		
Water circulation			Min/Max	L/min 26.4/57.8			24.0/54.2 27.3/61.4		
Buffer tank capacity			L	22			22		
Expansion vessel capacity			L	10			10		
Leaving water temperature range			Max	°C 60			60		
Water pipe connection diameter			Flow/Return	mm Ø 25.4/Ø 25.4			Ø 25.4/Ø 25.4		
Backup heater			Capacity	kW 6.0(3.0kW×2pcs.)			9.0(3.0kW×3pcs.)		
Outdoor unit specification									
Power source			Single phase, 230 V 50 Hz			3 phase, 400 V 50 Hz			
Current			Max	A 28.0			14.0 14.0		
Dimensions H × W × D			mm	1,428 × 1,080 × 480			1,428 × 1,080 × 480		
Weight (Net)			kg	137			138 138		
Refrigerant			Type (Global Warming Potential)			R410A (2,088)			
			Charge	kg	3.80			3.80	
Additional refrigerant charge amount			g/m	50			50		
Connection pipe	Diameter	Liquid	mm	Ø 9.52			Ø 9.52		
		Gas	mm	Ø 15.88			Ø 15.88		
	Length	Min/Max	m	5/30			5/30		
		Length(Pre-charge)	m	15			15		
Height difference	Max	m	25/15 (Outdoor unit:Upper/Lower)						
	Heating	°C	-25 to 35			-25 to 35			-25 to 35


*1: The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.
*2: All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/

Dimensions

Outdoor Unit:
Single phase: WOYG160LJL
3 phase: WOYK150LJL/WOYK170LJL

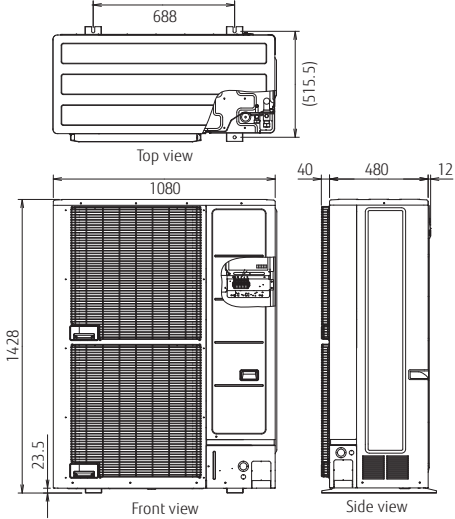

Hydraulic Indoor Unit:
Single phase : WSYG160DJ6
3 phase: WSYK170DJ9

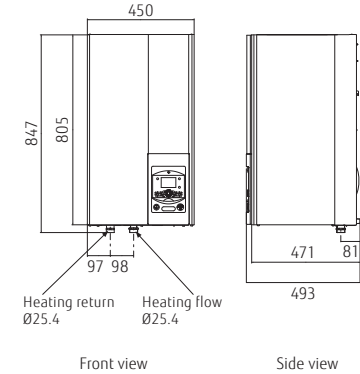


Split Type
High Power Series



High Leaving Water Temperature

High leaving water temperature of 60°C is kept even when outdoor temperature is down to -20°C without using backup heaters.

* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

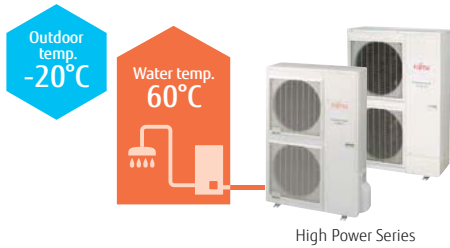


High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.

Energy efficiency class



*Temperature application : Heating Temp. 35°C.

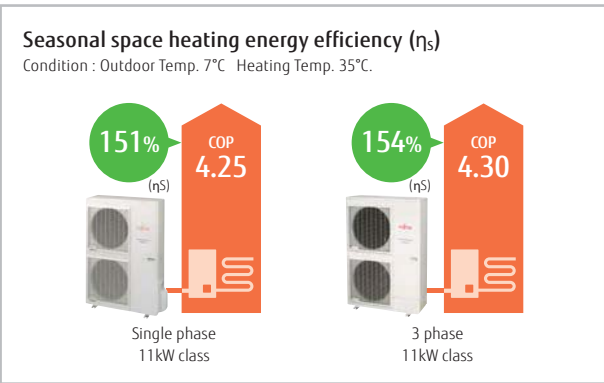

Hydraulic indoor unit:
WSYG140DG6 / [3 phase] WSYK160DG9
Outdoor unit:
WOYG112LHT / WOYG140LCTA
[3 phase] WOYK112LCTA / WOYK140LCTA /
WOYK160LCTA



Hydraulic indoor unit
Single phase/
3 phase



Outdoor unit
Single phase
11/14 kW



Outdoor unit
3 phase
11/14/16 kW

Specifications


Model Name		Hydrylic indoor unit		WSYG140DG6		WSYG140DG6		WSYK160DG9		WSYK160DG9		WSYK160DG9			
Capacity range		Outdoor unit		WOYG112LHT		WOYG140LCTA		WOYK112LCTA		WOYK140LCTA		WOYK160LCTA			
				11		14		11		14		16			
7°C/35°C floor heating * ¹	Heating capacity	kW	10.80		13.50		10.80		13.50		15.17				
	Input power		2.54		3.23		2.51		3.20		3.70				
	COP		4.25		4.18		4.30		4.22		4.10				
2°C/35°C floor heating * ¹	Heating capacity	kW	10.77		12.00		10.77		13.00		13.50				
	Input power		3.44		3.87		3.40		4.15		4.34				
	COP		3.13		3.10		3.17		3.13		3.11				
-7°C/35°C floor heating* ¹	Heating capacity	kW	10.38		11.54		10.38		12.20		13.50				
	Input power		4.32		5.08		4.28		5.13		5.40				
	COP		2.40		2.27		2.43		2.38		2.50				
Space heating characteristics* ²															
Temperature application		°C		55		35		55		35		55		35	
Energy efficiency class				A+		A++		A+		A+		A+		A+	
Rated heat output(P _{rated})		kW		9		11		11		13		9		14	
Seasonal space heating energy efficiency(η _s)		%		112		151		113		148		112		149	
Annual energy consumption		kWh		6,704		6,062		8,041		6,824		6,669		5,930	
Sound power level	Hydraulic indoor unit	dB(A)		46		46		46		46		46		46	
	Outdoor unit			68		69		69		68		70		71	
Hydraulic indoor unit Specification															
Power source				Single phase, 230 V 50 Hz				3 phase, 400 V 50 Hz							
Dimensions H×W×D		mm		800 × 450 × 457				800 × 450 × 457							
Weight (Net)		kg		42				42							
Water circulation		Min/Max		L/min		19.5/39.0		24.4/48.7		19.5/39.0		24.4/48.7		27.4/54.8	
Buffer tank capacity		L		16				16							
Expansion vessel capacity		L		8				8							
Leaving water temperature range		Max		°C		60				60					
Water pipe connection diameter		Flow/Return		Ø 25.4/Ø 25.4				Ø 25.4/Ø 25.4							
Backup heater		Capacity		kW				6.0(3.0kW×2pcs.)		9.0(3.0kW×3pcs.)					
Outdoor unit specification															
Power source				Single phase, 230 V 50 Hz				3 phase, 400 V 50 Hz							
Current		Max		A		22.0		25.0		9.0		9.5		10.5	
Dimensions H × W × D		mm		1,290 × 900 × 330				1,290 × 900 × 330							
Weight (Net)		kg		92				99							
Refrigerant		Type (Global Warming Potential)		R410A (2,088)				R410A (2,088)							
Additional refrigerant charge amount		Charge		kg		2.50				2.50					
				g/m		50				50					
Connection pipe	Diameter	Liquid		mm		Ø 9.52				Ø 9.52					
		Gas				Ø 15.88				Ø 15.88					
	Length	Min/Max		m		5/20				5/20					
	Length(Pre-charge)			m		15				15					
Operation range	Height difference	Max		m		15				15					
		Heating		°C		-25 to 35				-25 to 35					

*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.


*2:All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/

Dimensions


Outdoor Unit:
Single phase: WOYG112LHT/WOYG140LCTA

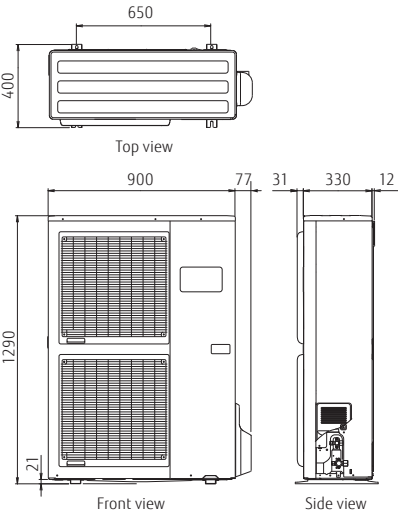

3 phase: WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

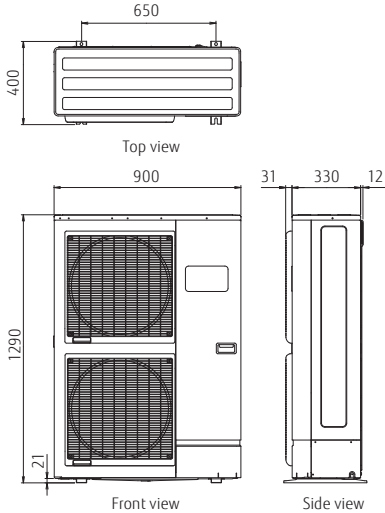

Hydraulic Indoor Unit:
Single phase: WSYG140DG6
3 phase: WSYK160DG9

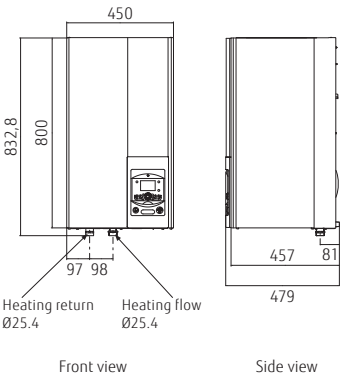


Split Type
Comfort Series



High Leaving Water Temperature

Maximum leaving water temperature is 55°C without backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

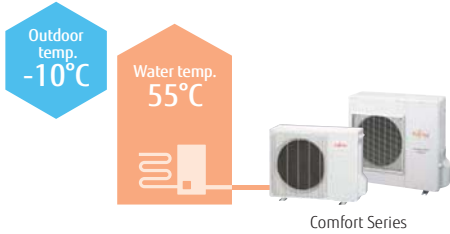

High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.


Energy efficiency class



*Temperature application : Heating Temp. 35°C.

Seasonal space heating energy efficiency (ηs)

Condition : Outdoor Temp. 7°C Heating Temp. 35°C.

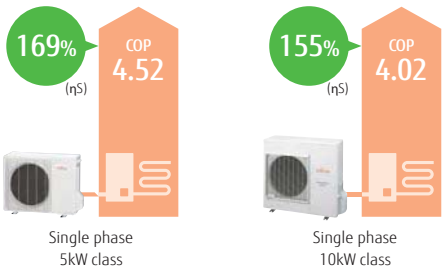

Hydraulic indoor unit:

WSYA050DG6 / WSYA100DG6

Outdoor unit:

WOYA060LFCA / WOYA080LFCA /
WOYA100LFTA



Hydraulic indoor unit
Single phase



Outdoor unit
Single phase
5/6/8kW



Outdoor unit
Single phase
10kW

Specifications

Model Name			Hydraulic indoor unit		WSYA050DG6		WSYA100DG6		WSYA100DG6	
Capacity range			Outdoor unit		WOYA060LFCA		WOYA060LFCA		WOYA100LFCA	
					5		6		8	
7°C/35°C floor heating * ¹			Heating capacity		4.50		6.00		7.50	
			Input power		0.996		1.41		1.84	
			COP		4.52		4.27		4.08	
2°C/35°C floor heating * ¹			Heating capacity		4.50		4.95		5.65	
			Input power		1.39		1.53		1.78	
			COP		3.24		3.24		3.17	
-7°C/35°C floor heating* ¹			Heating capacity		4.10		4.60		5.70	
			Input power		1.47		1.74		2.23	
			COP		2.79		2.64		2.56	
Space heating characteristics* ²										
Temperature application			°C		55		35		55	
Energy efficiency class					A+		A++		A+	
Rated heat output(P _{rated})			kW		4		4		5	
Seasonal space heating energy efficiency(η _s)			%		115		169		118	
Annual energy consumption			kWh		3,026		2,160		3,886	
Sound power level			Hydraulic indoor unit		46		46		46	
			Outdoor unit		65		63		69	
Hydraulic indoor unit Specification										
Power source					Single phase 230 V 50 Hz					
Dimensions H×W×D			mm		800 × 450 × 457					
Weight (Net)			kg		42					
Water circulation			Min/Max		L/min		8.1/16.2		10.8/21.7	
Buffer tank capacity			L		16					
Expansion vessel capacity			L		8					
Leaving water temperature range			Max		°C		55			
Water pipe connection diameter			Flow/Return		mm		Ø 25.4/Ø 25.4			
Backup heater			Capacity		kW		6.0(3.0kW×2pcs.)			
Outdoor unit specification										
Power source					Single phase 230 V 50 Hz					
Current			Max		A		12.5		17.5	
Dimensions H × W × D					mm		620 × 790 × 290		830 × 900 × 330	
Weight (Net)					kg		41		42	
Refrigerant			Type (Global Warming Potential)		R410A (2,088)					
Additional refrigerant charge amount			Charge		kg		1.10		1.40	
					g/m		25		40	
							Ø 12.7		Ø 6.35	
									Ø 15.88	
Connection pipe			Liquid		mm		Ø 12.7			
			Gas				Ø 6.35			
			Min/Max		m		5/30			
			Length(Pre-charge)		m		15			
			Height difference		m		20			
Operation range			Max		°C		-20 to 35			


*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.

*2:All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/


Dimensions

Outdoor Unit:

WOYA060LFCA/WOYA080LFCA

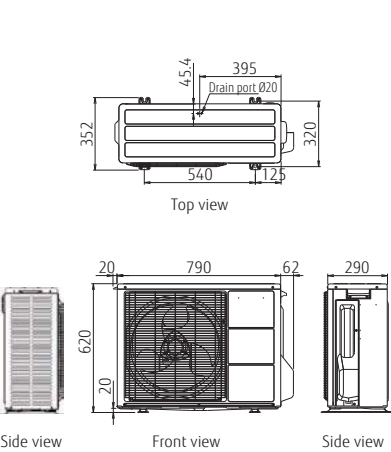


WOYA100LFTA

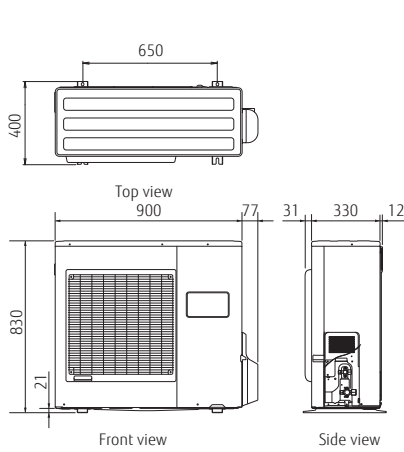

Hydraulic Indoor Unit:

WSYA050DG6/WSYA100DG6

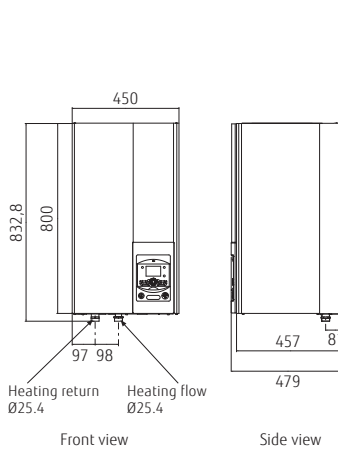

NEW

Split DHW Integrated Type

Comfort Series




WATERSTAGE™

High Leaving Water Temperature

Maximum leaving water temperature is 55°C without backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

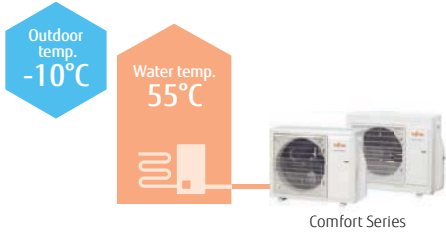

High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.


Energy efficiency class



*Temperature application : Heating Temp. 35°C.

Seasonal space heating energy efficiency (ηs)

Condition : Outdoor Temp. 7°C Heating Temp. 35°C.

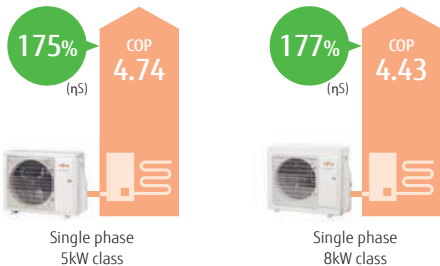

Hydraulic indoor unit:
WGYA050ML3 / WGYA080ML3
Outdoor unit:
WOYA060KLT / WOYA080KLT



Hydraulic indoor unit
Single phase



Outdoor unit
Single phase
5/6kW



Outdoor unit
Single phase
8kW

Specifications

Model Name	Hydraulic indoor unit		WGYA050ML3	WGYA080ML3	WGYA080ML3
	Outdoor unit		WOYA060KLT	WOYA060KLT	WOYA080KLT
Capacity range			5	6	8
7°C/35°C floor heating *1	Heating capacity	kW	4.50	5.50	7.50
	Input power		0.949	1.18	1.69
	COP		4.74	4.65	4.43
2°C/35°C floor heating *1	Heating capacity	kW	4.50	5.30	6.30
	Input power		1.33	1.65	1.96
	COP		3.39	3.22	3.21
-7°C/35°C floor heating*1	Heating capacity	kW	4.40	5.00	5.70
	Input power		1.59	1.90	2.13
	COP		2.76	2.63	2.68
Space heating characteristics*2					
Temperature application	°C		55	35	55
Energy efficiency class			A++	A+++	A++
Rated heat output (P _{cond})	kW		5	5	6
Seasonal space heating energy efficiency (η _s)	%		125	175	128
Annual energy consumption	kWh		3,035	2,322	3,903
Sound power level*3	Hydraulic indoor unit	dB(A)	40	-	40
	Outdoor unit		57	-	60
Domestic hot water characteristics*2					
Load profile			L	L	L
Energy efficiency class			A+	A+	A+
Energy efficiency (η _{wh})	%		130	130	130
Annual electricity consumption	kWh		793	793	793
Hydraulic indoor unit Specification					
Power source			Single phase 230 V 50 Hz		
Dimensions H×W×D	mm		1,863 x 648 x 700	1,863 x 648 x 700	1,863 x 648 x 700
Weight (Net)	kg		143	143	143
Water circulation	Min/Max	L/min	7.6/22.0	8.5/22.0	10.0/22.0
DHW capacity		L	190	190	190
Hot water heater capacity		kW	1.5	1.5	1.5
Buffer tank capacity		L	16	16	16
Expansion vessel capacity		L	8	8	8
Leaving water temperature range	Max	°C	55	55	55
Water pipe connection diameter	Flow/Return	mm	Ø 25.4/Ø 25.4	Ø 25.4/Ø 25.4	Ø 25.4/Ø 25.4
Hot water pipe connection diameter		mm	Ø 19.05	Ø 19.05	Ø 19.05
Backup heater	Capacity	kW	3.0	3.0	3.0
Outdoor unit specification					
Power source			Single phase 230 V 50 Hz		
Current	Max	A	13.0	13.0	18.0
Dimensions H × W × D		mm	632 x 799 x 290	632 x 799 x 290	716 x 820 x 315
Weight (Net)		kg	39	39	42
Refrigerant	Type (Global Warming Potential)		R32(675)	R32(675)	R32(675)
	Charge	kg	0.97	0.97	1.02
Additional refrigerant charge amount		g/m	25	25	25
			6.35	6.35	6.35
Connection pipe	Diameter	Liquid	mm	12.70	12.70
		Gas		12.70	12.70
	Length	Min/Max	m	3/30	3/30
	Length (Pre-charge)		m	15	15
Operation range	Height difference	Max	m	20	20
				20 to 35	20 to 35


*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.

*2:All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/


*3:The values of sound power level are based on measurement of EN12102 standard under conditions of EN14825 standard.

Dimensions


Outdoor Unit:
WOYA060KLT

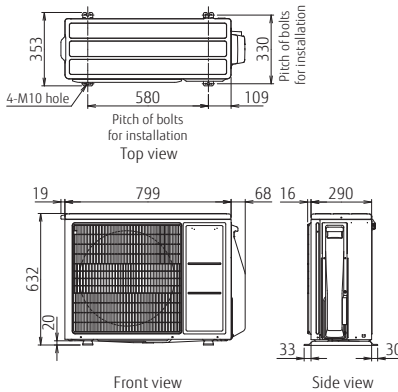

WOYA080KLT

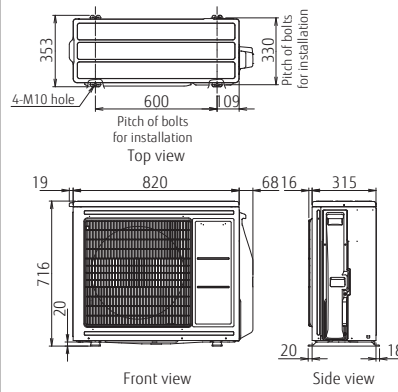

Hydraulic Indoor Unit:
WGYA050ML3/WGYA080ML3

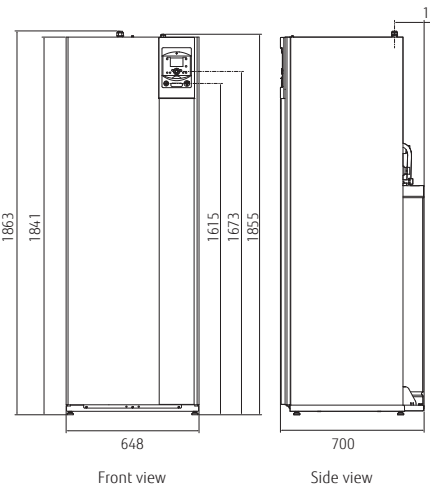

Outdoor unit technology



DC Fan Motor
High performance, high efficiency small DC fan motor mounted.



DC Twin Rotary Compressor
High efficient DC twin rotary compressor



DC Inverter
Smooth water temperature control realized by DC inverter control.


Split DHW
Integrated Type
Super High Power Series



High Leaving Water Temperature


High leaving water temperature of 60°C is kept even when outdoor temperature is down to -20°C without using backup heaters. And it's possible to supply 55°C at -22°C outdoor temperature without backup heater.

* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

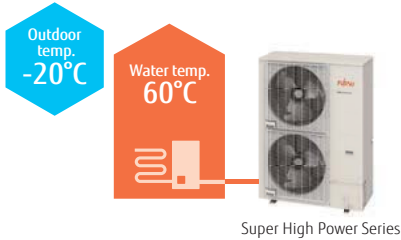

High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.

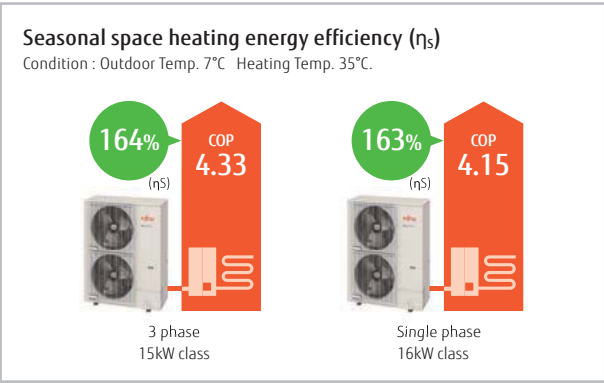

Extended Operation Range down to -25°C

Improved operation range down to -25°C outdoor temperature



Hydraulic indoor unit:
WGYG160DJ6 / [3 phase] WGYK170DJ9
Outdoor unit:
WOYG160LJL
[3 phase] WOYK150LJL / WOYK170LJL



Hydraulic indoor unit
Single phase/
3 phase



Outdoor unit
Single phase 16kW
3 phase 15/17kW


Specifications

Model Name		Hydraulic indoor unit	WGYG160DJ6	WGYK170DJ9	WGYK170DJ9
		Outdoor unit	WOYG160LJL	WOYK150LJL	WOYK170LJL
Capacity range			16	15	17
7°C/35°C floor heating *1	Heating capacity	kW	16.00	15.00	17.00
	Input power		3.86	3.46	4.10
	COP		4.15	4.33	4.15
2°C/35°C floor heating *1	Heating capacity	kW	13.30	13.20	13.50
	Input power		4.25	4.06	4.27
	COP		3.13	3.25	3.16
-7°C/35°C floor heating*1	Heating capacity	kW	14.50	13.20	15.00
	Input power		5.27	4.55	5.32
	COP		2.75	2.90	2.82
Space heating characteristics*2					
Temperature application		°C	55	35	55
Energy efficiency class			A++	A++	A++
Rated heat output(P _{rated})		kW	14	16	17
Seasonal space heating energy efficiency(η _s)		%	125	163	130
Annual energy consumption		kWh	8,757	8,014	9,915
Sound power level	Hydraulic indoor unit	dB(A)	45	45	45
	Outdoor unit		67	66	67
Domestic hot water characteristics*2					
Load profile				L	
Energy efficiency class				A	
Energy efficiency(η _{wh})		%		109	
Annual electricity consumption		kWh		941	
Hydraulic indoor unit Specification					
Power source			Single phase, 230 V 50 Hz	3 phase, 400 V 50 Hz	
Dimensions H×W×D		mm		1,841 × 648 × 698	
Weight (Net)		kg		166	
Water circulation		Min/Max L/min	26.4/57.8	24.0/54.2	27.3/61.4
DHW capacity		L		190	
Hot water heater capacity		kW		1.5	
Buffer tank capacity		L		22	
Expansion vessel capacity		L		12	
Leaving water temperature range		Max °C		60	
Water pipe connection diameter		Flow/Return mm		Ø 25.4/Ø 25.4	
Hot water pipe connection diameter		mm		Ø 19.05	
Backup heater		Capacity kW	6.0(3.0kW×2pcs.)	9.0(3.0kW×3pcs.)	
Outdoor unit specification					
Power source			Single phase, 230 V 50 Hz	3 phase, 400 V 50 Hz	
Current		Max A	28.0	14.0	
Dimensions H × W × D		mm	1,428 × 1,080 × 480	1,428 × 1,080 × 480	
Weight (Net)		kg	137	138	
Refrigerant		Type (Global Warming Potential)	R410A (2,088)	R410A (2,088)	
Additional refrigerant charge amount		Charge kg	3.80	3.80	
		g/m	50	50	
Connection pipe	Diameter	Liquid mm	Ø 9.52	Ø 9.52	
	Length	Gas mm	Ø 15.88	Ø 15.88	
	Length(Pre-charge)	Min/Max m	5/30	5/30	
	Height difference	Max m	15	15	
Operation range		Heating °C	25/15 (Outdoor unit:Upper/Lower)	25/15 (Outdoor unit:Upper/Lower)	
			-25 to 35	-25 to 35	


*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.
*2:All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/

Dimensions

Outdoor Unit:
Single phase: WOYG160LJL
3 phase: WOYK150LJL/WOYK170LJL

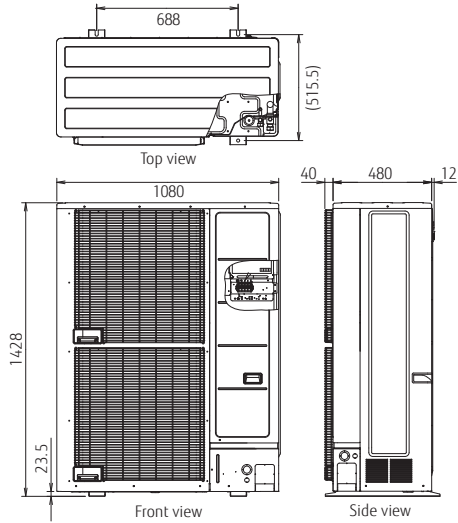

Hydraulic Indoor Unit:
Single phase: WGYG160DJ6
3 phase: WGYK170DJ9

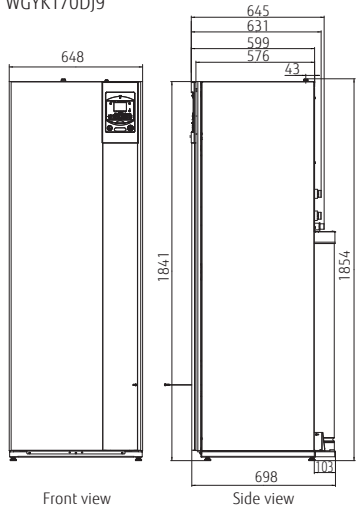

Split DHW
Integrated Type


High Power Series



High Leaving Water Temperature

High leaving water temperature of 60°C is kept even when outdoor temperature is down to -20°C without using backup heaters.

* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

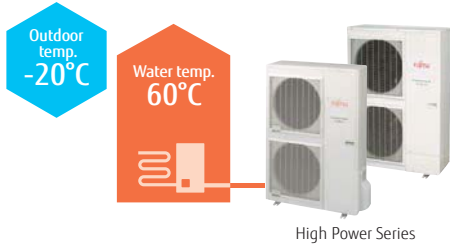


High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.

Energy efficiency
class




*Temperature application : Heating Temp. 35°C.

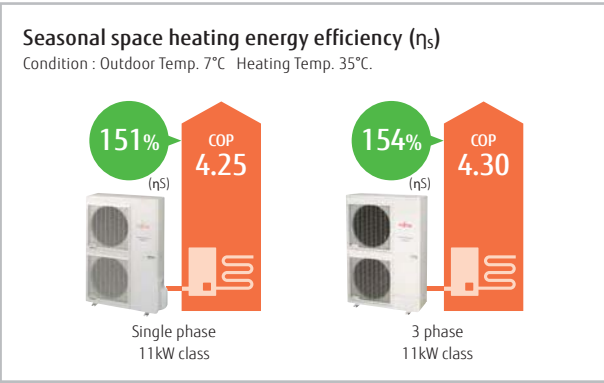

Optimization of refrigerant cycle operation

High Power model achieves a high performance and efficiency by adopting twin sensors and control technology corresponding to hot water heating.

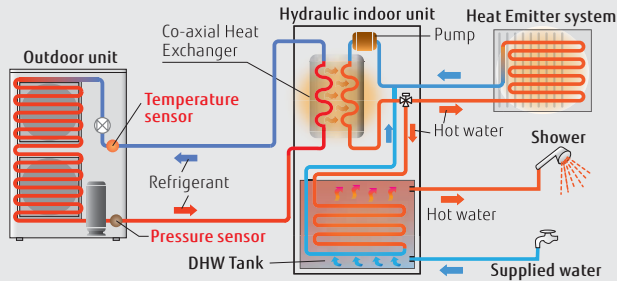

Hydraulic indoor unit:
WGYG140DG6 / [3 phase] WGYK160DG9
Outdoor unit:
WOYG112LHT / WOYG140LCTA
[3 phase] WOYK112LCTA / WOYK140LCTA /
WOYK160LCTA



Hydraulic indoor unit
Single phase/
3 phase



Outdoor unit
Single phase
11/14 kW



Outdoor unit
3 phase
11/14/16 kW

Specifications

Model Name	Hydralic indoor unit		WGYG140DG6		WGYG140DG6		WGYK160DG9		WGYK160DG9		WGYK160DG9			
Capacity range	Outdoor unit		WOYG112LHT		WOYG140LCTA		WOYK112LCTA		WOYK140LCTA		WOYK160LCTA			
7°C/35°C floor heating * ¹	Heating capacity	kW	11		14		11		14		16			
	Input power		10.80		13.50		10.80		13.50		15.17			
	COP		2.54		3.23		2.51		3.20		3.70			
2°C/35°C floor heating * ¹	Heating capacity	kW	4.25		4.18		4.30		4.22		4.10			
	Input power		10.77		12.00		10.77		13.00		13.50			
	COP		3.44		3.87		3.40		4.15		4.34			
-7°C/35°C floor heating* ¹	Heating capacity	kW	3.13		3.10		3.17		3.13		3.11			
	Input power		10.38		11.54		10.38		12.20		13.50			
	COP		4.32		5.08		4.28		5.13		5.40			
			2.40		2.27		2.43		2.38		2.50			
Space heating characteristics* ²														
Temperature application		°C	55	35	55	35	55	35	55	35	55	35		
Energy efficiency class			A+	A++	A+	A+	A+	A++	A+	A++	A+	A+		
Rated heat output(P _{rated})		kW	9	11	11	13	9	11	11	13	13	14		
Seasonal space heating energy efficiency(η _s)		%	112	151	113	148	112	154	117	150	117	149		
Annual energy consumption		kWh	6,704	6,062	8,041	6,824	6,669	5,930	7,803	6,738	9,062	7,408		
Sound power level	Hydraulic indoor unit	dB(A)	46		46		46		46		46			
	Outdoor unit		68		69		69		68		71			
Domestic hot water characteristics* ²														
Load profile			L											
Energy efficiency class			A											
Energy efficiency(η _{wh})		%	88											
Annual electricity consumption		kWh	1166											
Hydraulic indoor unit Specification														
Power source			Single phase 230 V 50 Hz					3 phase, 400 V 50 Hz						
Dimensions H×W×D		mm	1,840× 648 × 698											
Weight (Net)		kg	152											
Water circulation		Min/Max	L/min		19.5/39.0		24.4/28.7		19.5/39.0		24.4/48.7		27.4/54.8	
DHW capacity		L	190											
Hot water heater capacity		kW	1.5											
Buffer tank capacity		L	16											
Expansion vessel capacity		L	12											
Leaving water temperature range		Max	°C		60									
Water pipe connection diameter		Flow/Return	mm		Ø 25.4/Ø 25.4									
Hot water pipe connection diameter		mm	Ø 19.05											
Backup heater		Capacity	kW	6.0(3.0kW×2pcs.)					9.0(3.0kW×3pcs.)					
Outdoor unit specification														
Power source			Single phase 230 V 50 Hz					3 phase, 400 V 50 Hz						
Current		Max	A	22.0		25.0		9.0		9.5		10.5		
Dimensions H × W × D		mm	1,290 × 900 ×330											
Weight (Net)		kg	92					99						
Refrigerant		Type (Global Warming Potential)	R410A (2,088)											
Additional refrigerant charge amount		Charge	kg	2.50										
		g/m	50											
Connection pipe	Diameter	Liquid	Ø 9.52											
		Gas	Ø 15.88											
	Length	Min/Max	5/20											
	Length(Pre-charge)	m	15											
Operation range	Height difference	Max	15											
	Heating	°C	-25 to 35											


*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.

*2:All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/


Dimensions

Outdoor Unit:

Single phase: WOYG112LHT/WOYG140LCTA

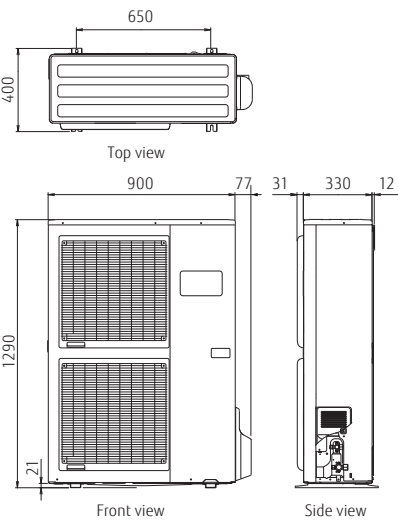


3 phase: WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

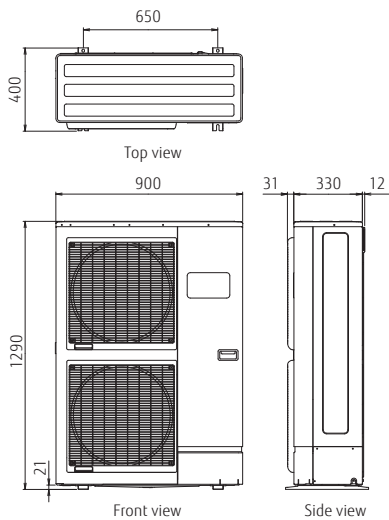

Hydraulic Indoor Unit:

Single phase: WGYG140DG6

3 phase: WGYK160DG9

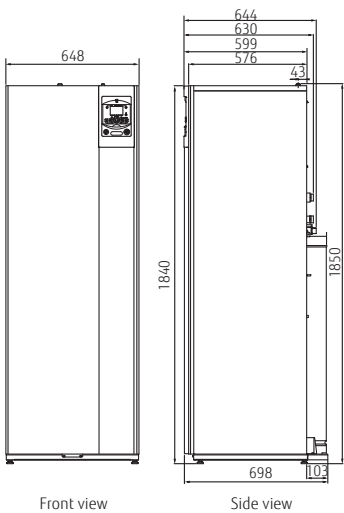

Split DHW
Integrated Type


Comfort Series



High Leaving Water Temperature

Maximum leaving water temperature is 55°C without backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the hot water supply temperature, backup heater can be used for the auxiliary operation.

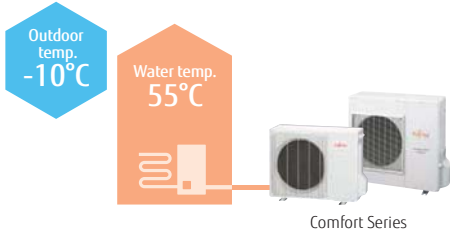

High COP

Waterstage Air to water heat pumps work much more efficiently and save energy compared to traditional heating systems.


Energy efficiency
class



*Temperature application : Heating Temp. 35°C.

Seasonal space heating energy efficiency (ηs)

Condition : Outdoor Temp. 7°C Heating Temp. 35°C.

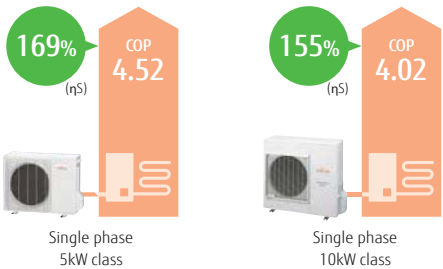

Outdoor unit technology



DC Fan Motor
High performance, high efficiency small DC fan motor mounted.



DC Twin Rotary Compressor
High efficient DC twin rotary compressor



DC Inverter
Smooth water temperature control realized by DC inverter control.

Hydraulic indoor unit:
WGYA050DG6 / WGYA100DG6
Outdoor unit:
WOYA060LFCA / WGYA080LFCA /
WOYA100LFTA



Hydraulic indoor unit
Single phase



Outdoor unit
Single phase
5/6/8kW



Outdoor unit
Single phase
10kW


Specifications

Model Name	Hydudlic indoor unit		WGYA050DG6		WGYA100DG6		WGYA100DG6		WGYA100DG6		
Capacity range	Outdoor unit		WOYA060LFCA		WOYA060LFCA		WOYA080LFCA		WOYA100LFTA		
			5		6		8		10		
7°C/35°C floor heating * ¹	Heating capacity	kW	4.50		6.00		7.50		10.00		
	Input power		0.996		1.41		1.84		2.49		
	COP		4.52		4.27		4.08		4.02		
2°C/35°C floor heating * ¹	Heating capacity	kW	4.50		4.95		5.65		7.70		
	Input power		1.39		1.53		1.78		2.47		
	COP		3.24		3.24		3.17		3.12		
-7°C/35°C floor heating* ¹	Heating capacity	kW	4.10		4.60		5.70		7.40		
	Input power		1.47		1.74		2.23		2.97		
	COP		2.79		2.64		2.56		2.49		
Space heating characteristics* ²											
Temperature application		°C	55	35	55	35	55	35	55	35	
Energy efficiency class			A+	A++	A+	A++	A+	A++	A+	A++	
Rated heat output(P _{rated})		kW	4	4	5	5	6	7	8	8	
Seasonal space heating energy efficiency(η _s)		%	115	169	115	169	118	156	113	155	
Annual energy consumption		kWh	3,026	2,160	3,180	2,505	3,886	3,375	5,415	4,415	
Sound power level	Hydraulic indoor unit	dB(A)	46		46		46		46		
	Outdoor unit		65	60	65	63	65	69	68	69	
Domestic hot water characteristics* ²											
Load profile			L								
Energy efficiency class			A+								
Energy efficiency(η _{wh})		%	120								
Annual electricity consumption		kWh	880								
Hydraulic indoor unit Specification											
Power source			Single phase 230 V 50 Hz								
Dimensions H×W×D		mm	1,840×648×698								
Weight (Net)		kg	152								
Water circulation		Min/Max L/min	8.1/16.2		10.8/21.7		13.5/27.1		18.1/36.1		
DHW capacity		L	190								
Hot water heater capacity		kW	1.5								
Buffer tank capacity		L	16								
Expansion vessel capacity		L	12								
Leaving water temperature range		Max °C	55								
Water pipe connection diameter		Flow/Return mm	Ø 25.4/Ø 25.4								
Hot water pipe connection diameter		mm	Ø 19.05								
Backup heater		Capacity kW	6.0(3.0kW×2pcs.)								
Outdoor unit specification											
Power source			Single phase 230 V 50 Hz								
Current		Max A	12.5				17.5		18.5		
Dimensions H × W × D		mm	620 × 790 ×290						830 × 900 ×330		
Weight (Net)		kg	41				42		60		
Refrigerant		Type (Global Warming Potential)	R410A (2,088)								
Additional refrigerant charge amount		Charge kg	1.10				1.40		1.80		
		g/m	25						40		
			Ø 6.35						Ø 9.52		
Connection pipe	Diameter	Liquid mm	Ø 12.70								
		Gas mm	Ø 15.88								
	Length	Min/Max m	5/30								
	Length(Pre-charge)	m	15								
	Height difference	Max m	20								
Operation range		Heating °C	-20 to 35								


*1:The values of heating capacity/input power/COP are based on measurement of EN14511 standard. Usage environment, such as operation of the heating equipment, room temperature, and controller adjustments, may cause disparities between practically determined values and these values.
*2:All information of ErP can be available for downloaded from www.fujitsu-general.com/global/support/downloads/search/

Dimensions


Outdoor Unit:
WOYA060LFCA/WOYA080LFCA

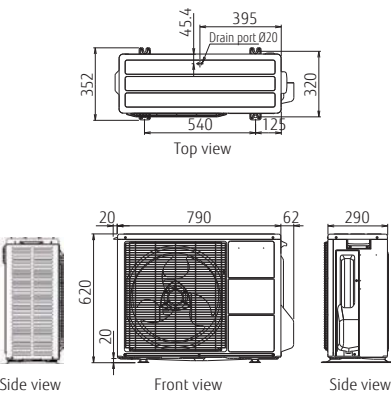

WOYA100LFTA

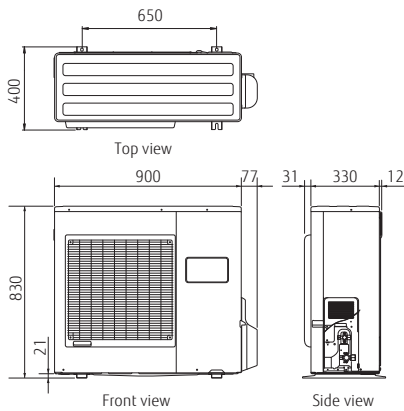

Hydraulic Indoor Unit:
WGYA050DG6/WGYA100DG6



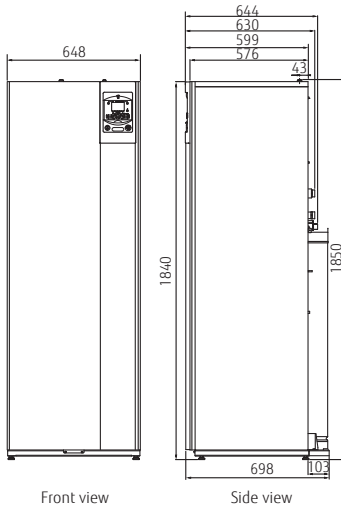


Control Overview

User's needs are supported by offering a variety of controls, such as individual control and remote control options.



Individual Control

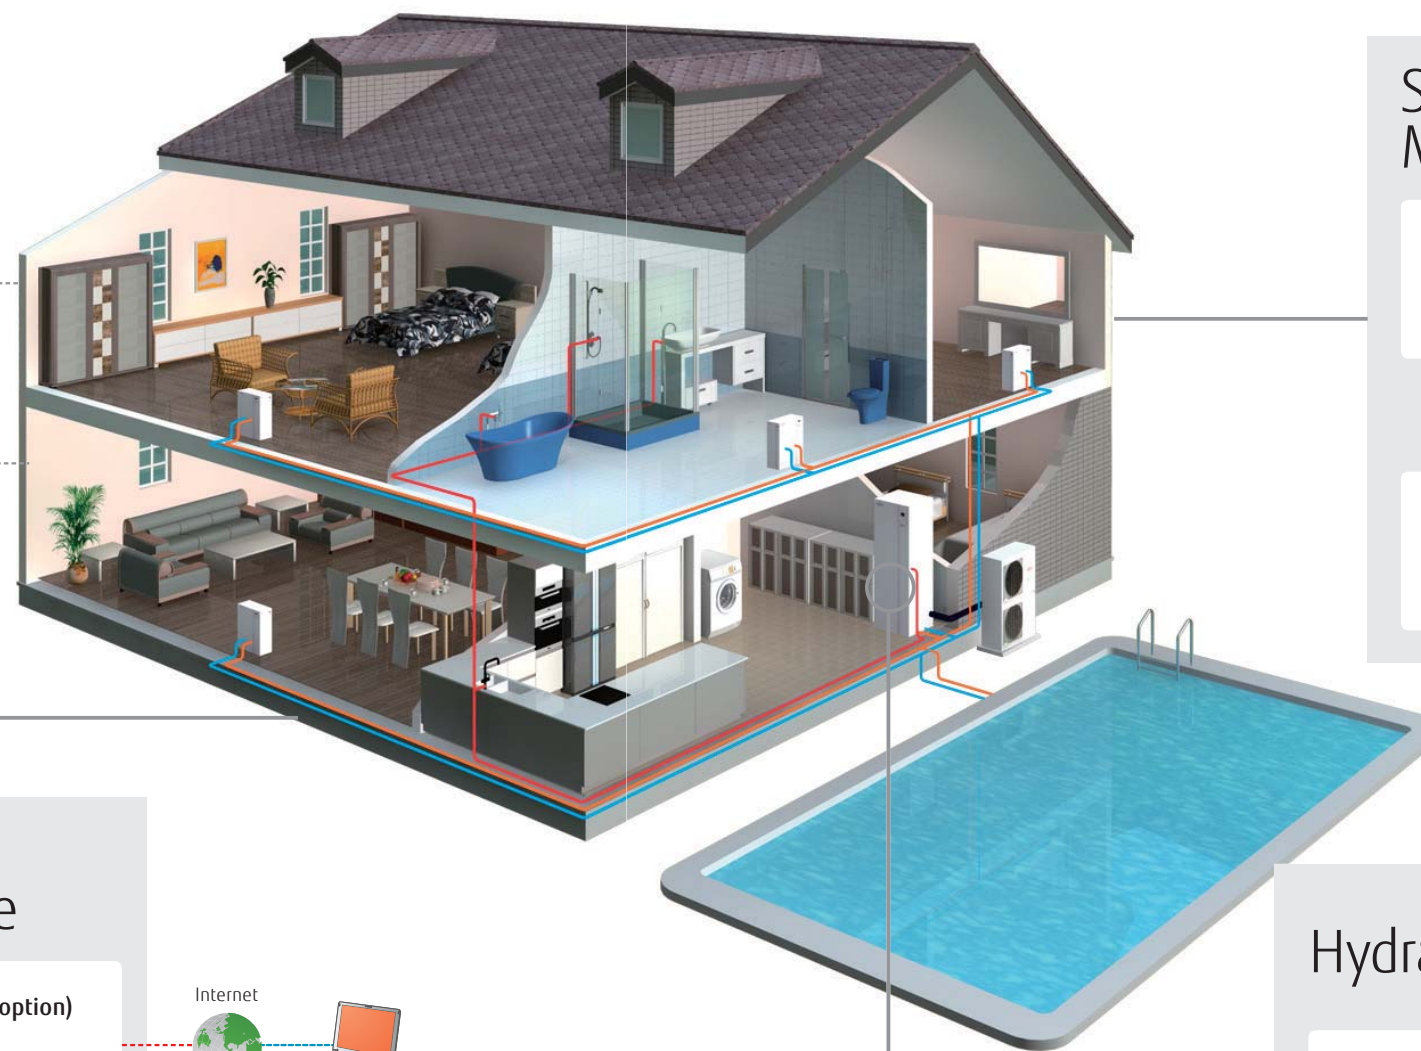

Service & Maintenance Tool



OR




Service Tool
(option)




*3: UTW-KW1XD or UTW-KW4XD is required for the connection.
*4: UTW-KL1XD is required for the connection.

Adaptor for external device



*2: Additional optional parts necessary.



Hydraulic Indoor Unit Controller

Simple operation mode setting

- Selecting the heating mode and Domestic hot water operation

Large LCD display

- Operation status display
- Error display
- plain text

Navigation and setting

- Selecting the heating menu
- Setting program timer



Corresponding to multi languages



Comfort Control

The high grade heating controller adjusts the flow temperature automatically depending on the weather conditions, so that the room ambient temperature and the domestic hot water temperature are maintained at the desired levels.

Hydraulic Indoor Unit Controller

4 Heating mode

1. Automatic mode

Comfort/Reduce mode switching automatically according to time program

2. Reduce mode

Constant reduce temperature

3. Comfort mode

Constant comfort temperature

4. Protection mode


Stand-by mode with anti-frost protection



Useful Function


Automatic heating curve control

Automatic temperature regulation in accordance with heating curve (Depends on heating terminal and outdoor temperature)

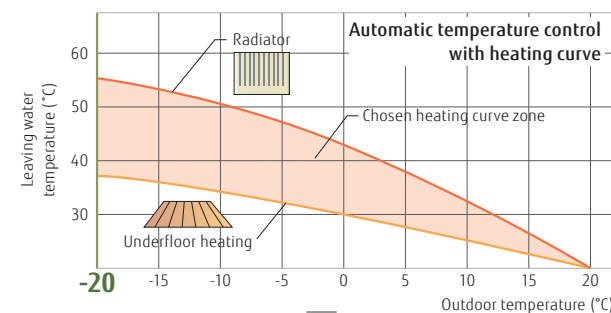

Heating curve off-set: Adjust setting room temp.

This can be fine adjusted when too warm or too cold.

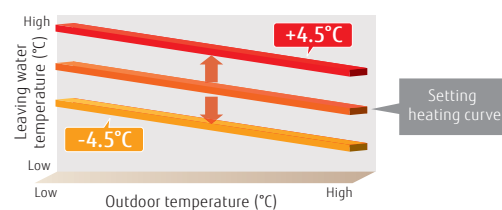

Quick recovery from defrost operation

Maintains the room temperature during defrost operation by boost start operation.


Auto-changeover

If the cooling operation function is set, the system can automatically switch to cooling or heating, depending on the outdoor temperature to provide all-season comfortable air conditioning.

2 Zone individual control


2 Zone individual control (2 underfloor heating zones or underfloor heating + radiator zone, etc.)^{*1}

^{*1}: Optional parts are required.



2 Stage low noise mode

Outdoor unit can be switched to silent mode, depending on the installation environment.
^{*1}Valid only for High Power



Backup heater operation

Backup heater can operate at low outdoor temperature so that comfortable status can be maintained. The backup heater is controlled intelligently just as a security backup for very cold days/nights and only activated when really necessary.

Energy Saving

Programmable timer

- The setting of timer operation can easily be adjusted.
- Changing the heating mode linked with time is possible.

Day-Weekly timer setting

- The day-weekly timer can be set up for up to 3 times per day.
- Allows separate settings for each day of the week.

Holiday timer setting

- The holiday timer can be set up for up to 8 periods
- If you are absent for a long time in the winter, freezing of room can be prevented.

Peak Cut Function^{*2}

This function performs operation by setting a peak current value and reducing the power consumption.


Mode	The ratio of suppressing the power consumption
1	100%
2	75%
3	50%
4	Almost 0%

^{*2}: Optional parts are required.

Safety Function


Anti-legionella function

The growth of Legionella in DHW tank is suppressed and safe and clean hot water is supplied at all times.




Anti-freeze function

Water circulation and compressor can be automatically achieved at low outdoor temperature. Freezing of circulated water can be prevented.

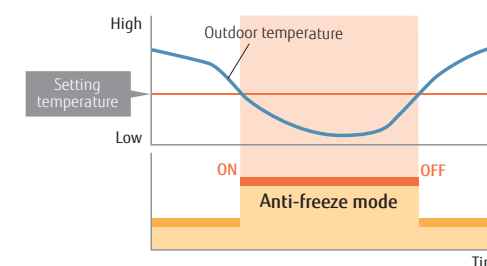

Emergency operation

System can continuously supply hot water by built in back up heater or boiler, as emergency, even if an error is occurred.

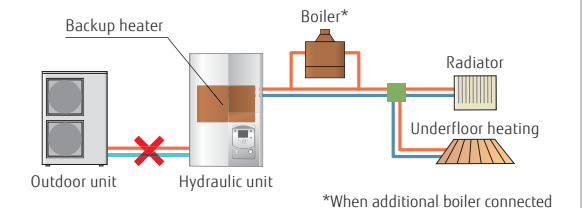

^{*}When additional boiler connected

Error/Maintenance alarm

Quick error handling service and maintenance are possible by this function.




- Error history saves 10 errors in memory
- Display telephone No. of service company




System Configuration

Split Type

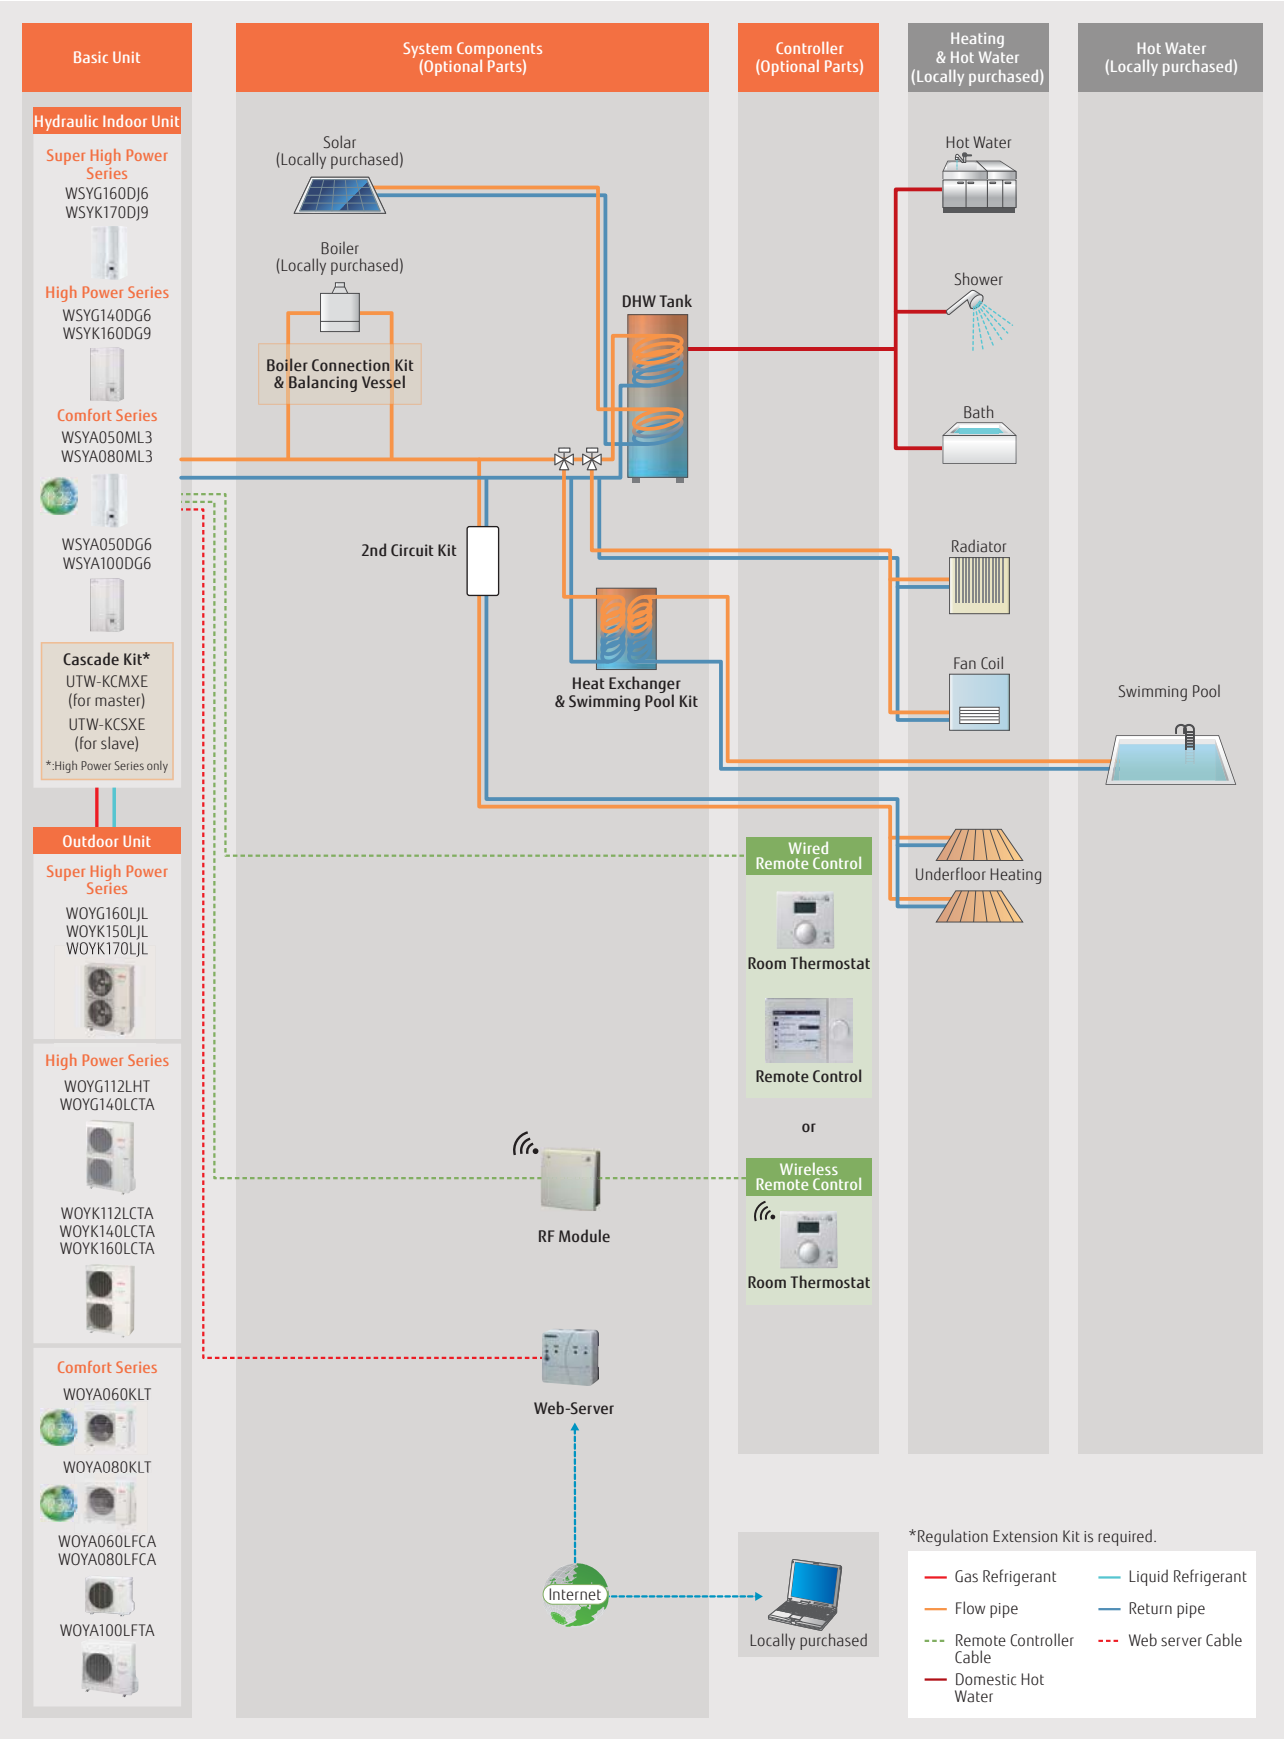


Split DHW Integrated Type

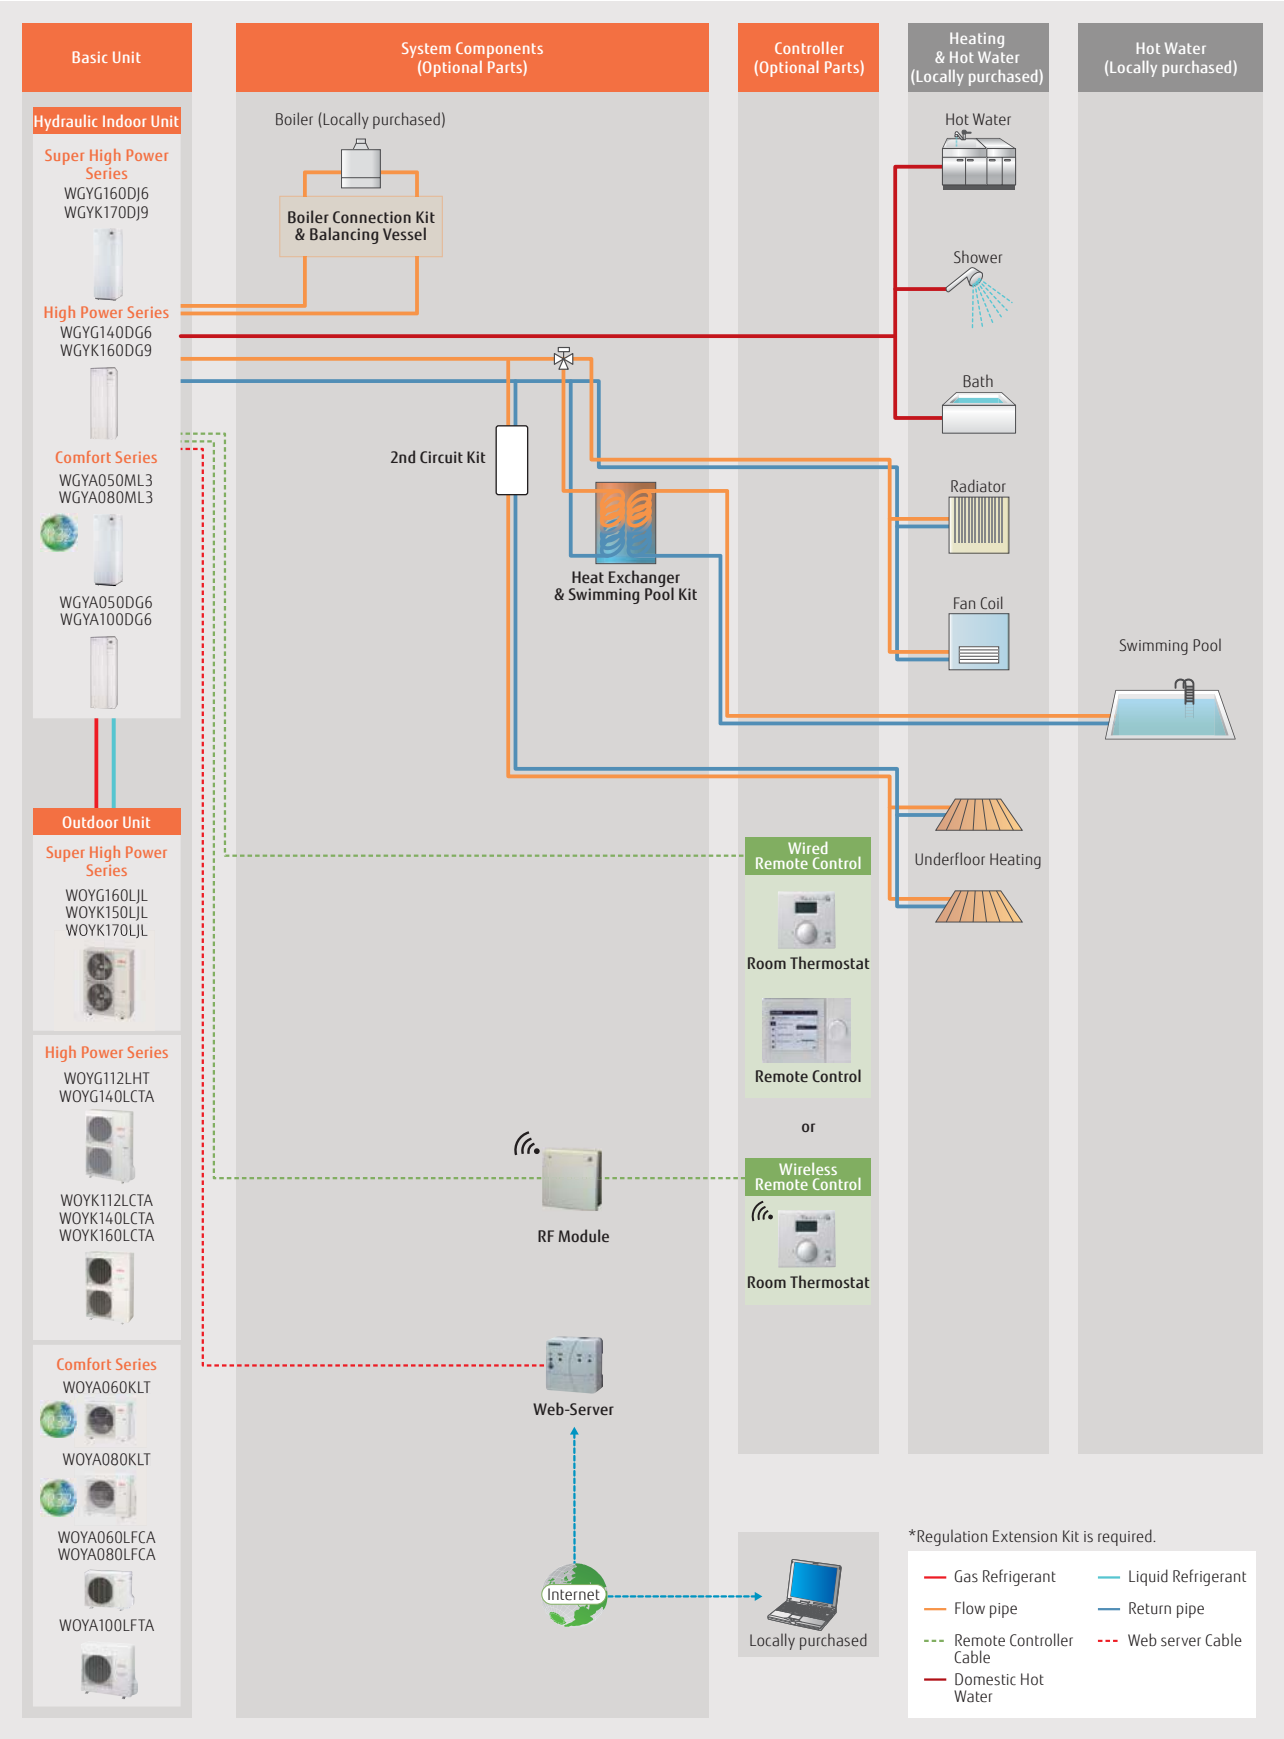


Case Studies

Split Type



**2 emitter simultaneous heating
(Individual control)**
Underfloor heating + Radiator

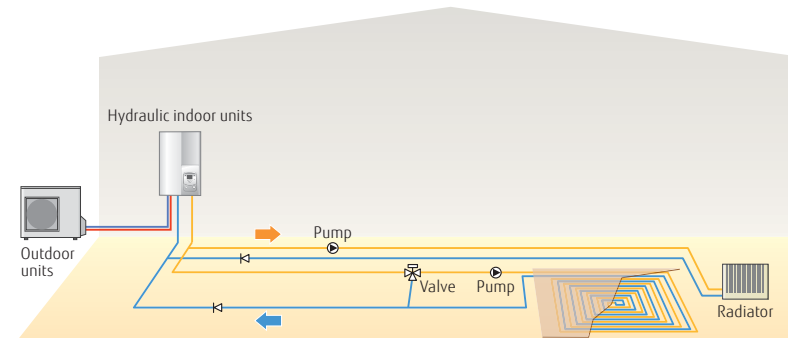

**Boiler connected to heating
(Boiler + Heating)**

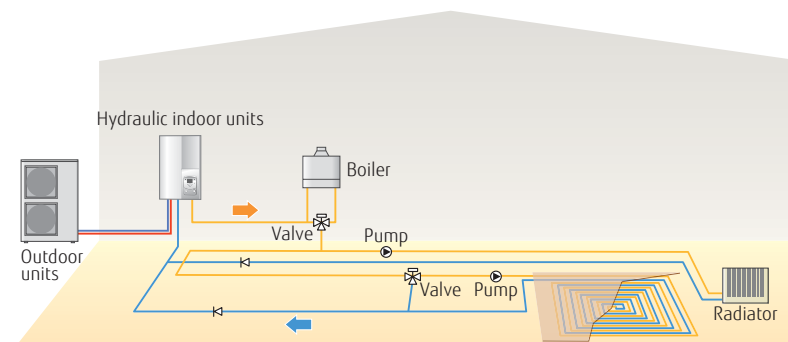


**2 emitter simultaneous heating &
Domestic Hot Water (Cascade)**

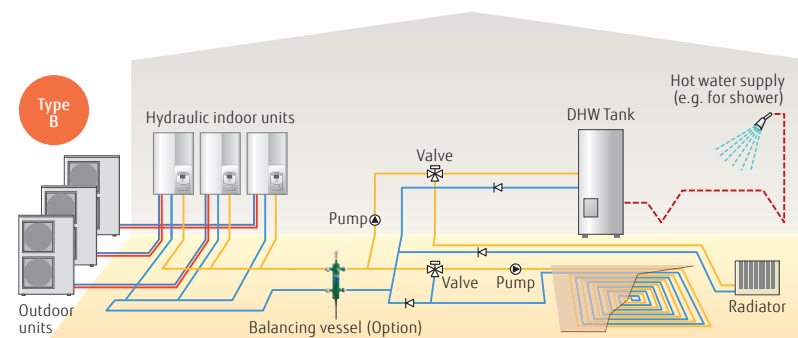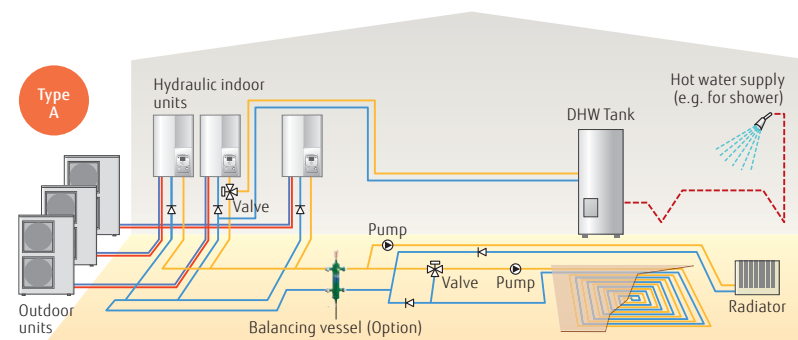


Split DHW Integrated Type


**Single heating & Domestic Hot Water
Radiator + Domestic Hot Water**

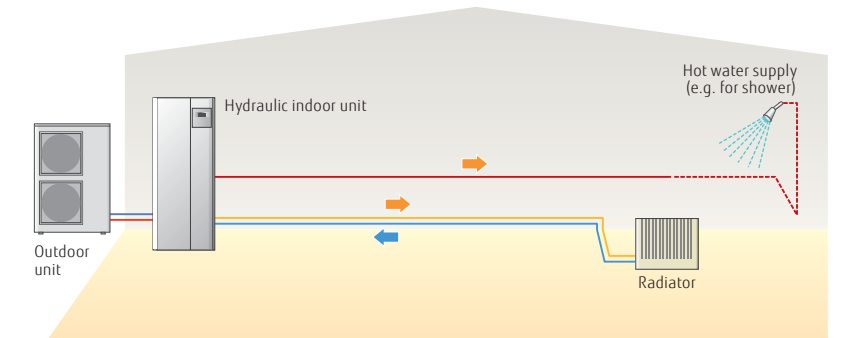

**2 emitter simultaneous heating
(Individual control) & Domestic Hot Water
Radiator + Domestic Hot Water**

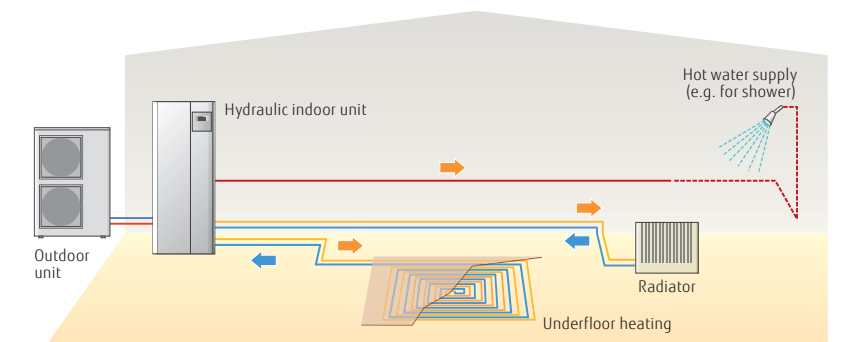


**Boiler connected to heating (Boiler + Heating)
& Domestic Hot Water**

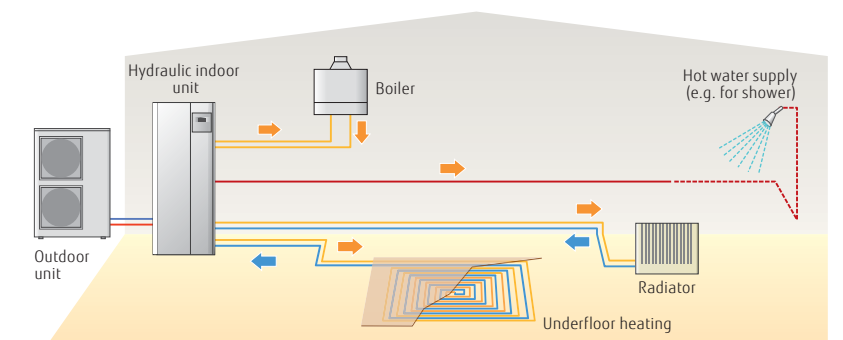

Simplified installation

Pre-setting configurations

When installed, the controller makes it simple to set system settings without having to individually set the system's components and units.

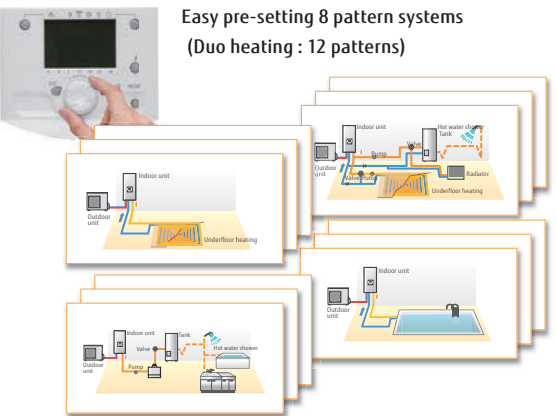


Configuration (Parameter 5700)	Type of installation
Pre setting 1	1 heating circuit
Pre setting 2	2 heating circuit
Pre setting 3	1 heating circuit & boiler backup
Pre setting 4	2 heating circuit & boiler backup
Pre setting 5	1/2 heating circuit & buffer control
Pre setting 6	1/2 heating circuit & buffer control & boiler backup
Pre setting 7	cascade connection Master
Pre setting 8	cascade connection A
Pre setting 9	cascade connection B/C

- DHW & solar control auto detection
- pool heating & cooling optional

Outdoor temperature simulation


It can be checked whether each unit operates correctly under the set conditions and expected outdoor temperatures when the system is actually assembled.

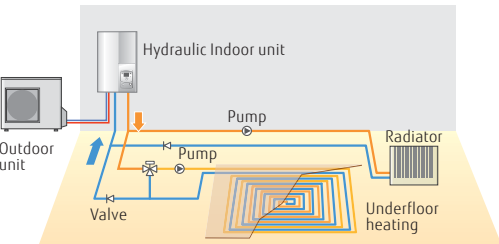


Outdoor temperatures in the range from -50°C to +50°C can be simulated.

Concrete Floor drying

When underfloor heating is installed, it can be used to dry the concrete surrounding the hot water piping more quickly to shorten the construction period.

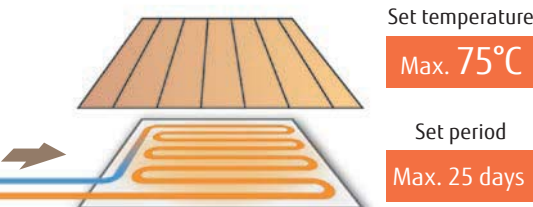

Controller features a large LCD display and buttons to make setting functions easy

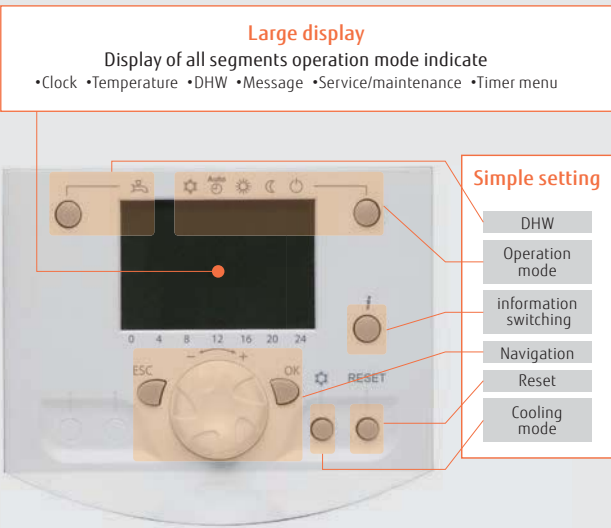

Main operation flow and setting contents for installers and end users


	Flow Chart	Example Item
Installers	1 Install Setting	Pump speed setting, Configuration. Heating curve setting, Heat pump shut off
	2 Option Setting	Cooling kit, DHW kit, Boiler kit, Swimming pool kit
	3 Convenient Function	Automatic Heating curve setting, Underfloor controlled driving, Outdoor temperature adjustment, Maintenance period setting
	4 workout Setting	Outdoor temperature simulator
	5 Confirmation	Operation conform (Heating cooling, DHW, option,)
End users	6 User Setting	Date and time, time program, Operation temperature setting

Easy Installation & Maintenance

- All hydraulic safety & controlling components built in, no additional selection required
- Lifting bars for an installation without any difficulty or risk
- Easy access for maintenance operations
- Refrigerant pump down operation

Maintenance Support

Diagnostics function for trouble shooting


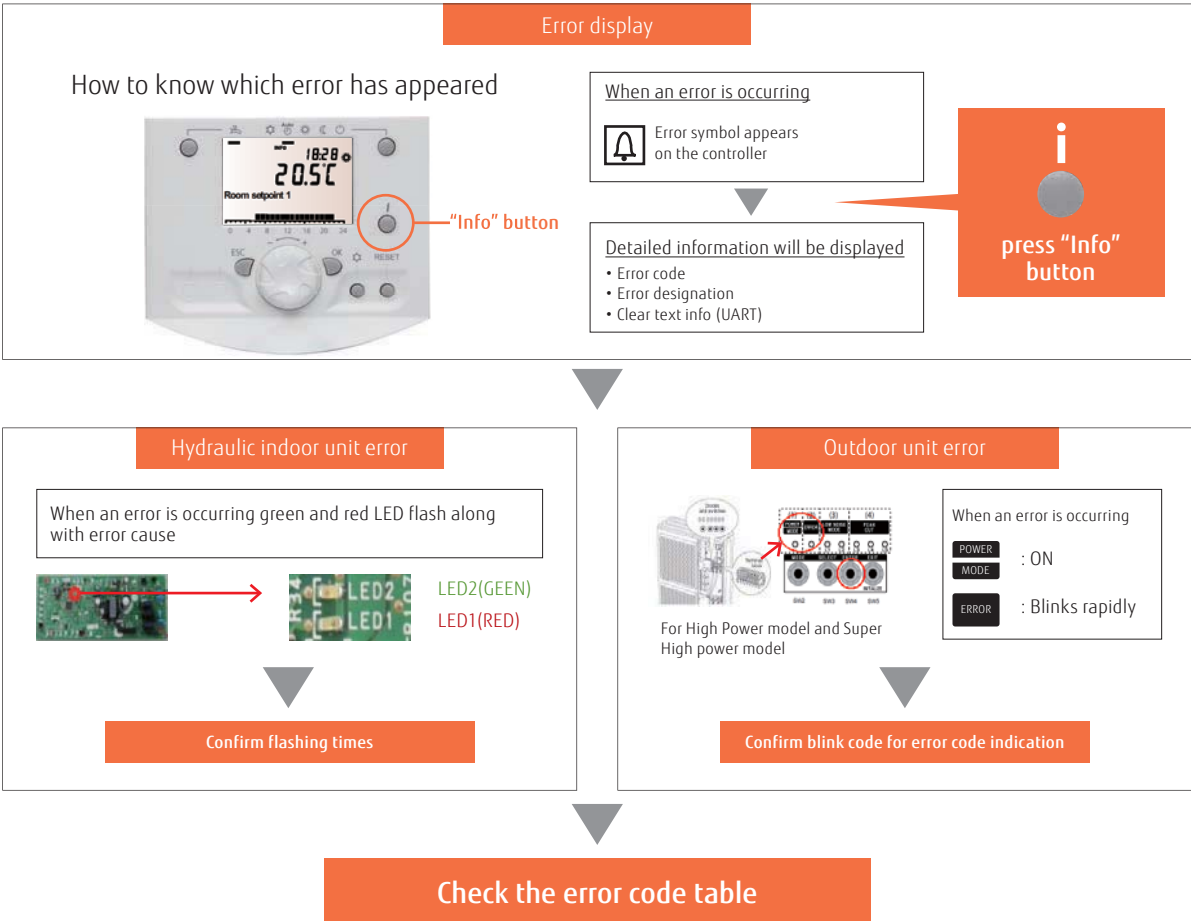


Installation Limitations

Equipment Installation & Electrical Wiring



Split type Hydraulic indoor unit

- Hydraulic indoor unit is to be hanged on the wall
- Weight ≤ 88 kg (including water)
- Space for maintenance should be respected

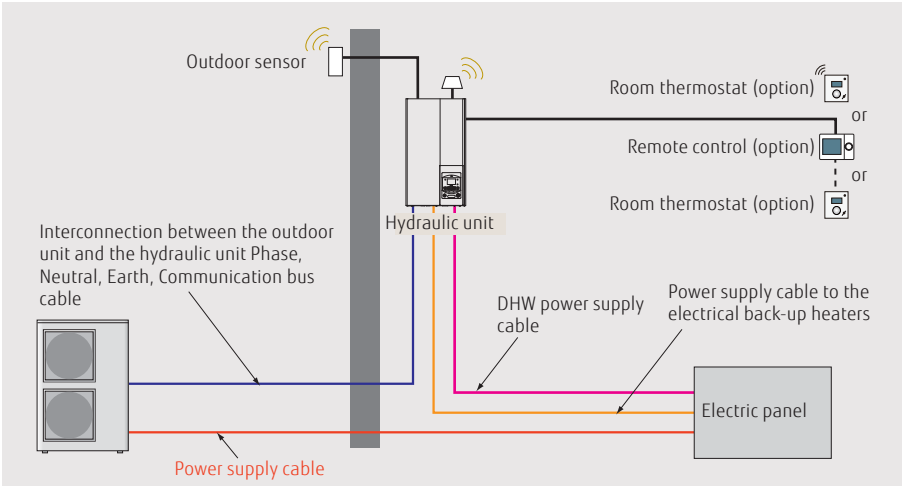


Split DHW integrated type Hydraulic indoor unit

- Floor standing
- Weight ≤ 393 kg (including water)
- Space for maintenance should be respected.

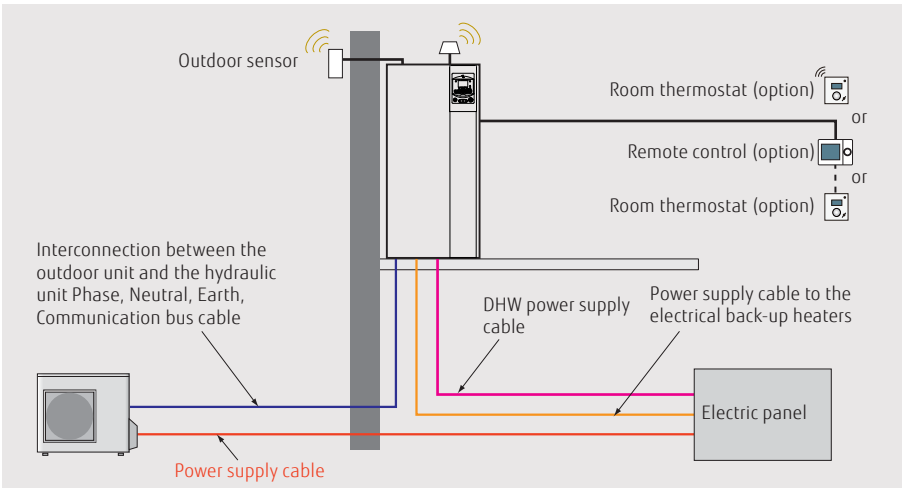


Piping and Wiring split type



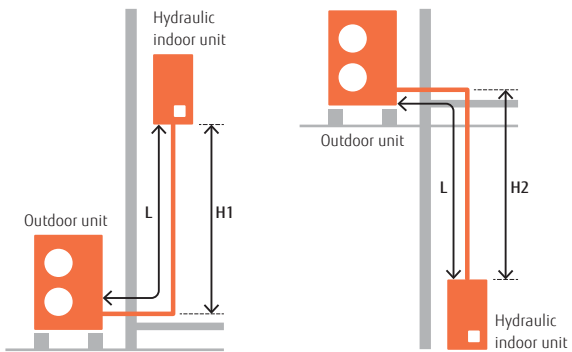



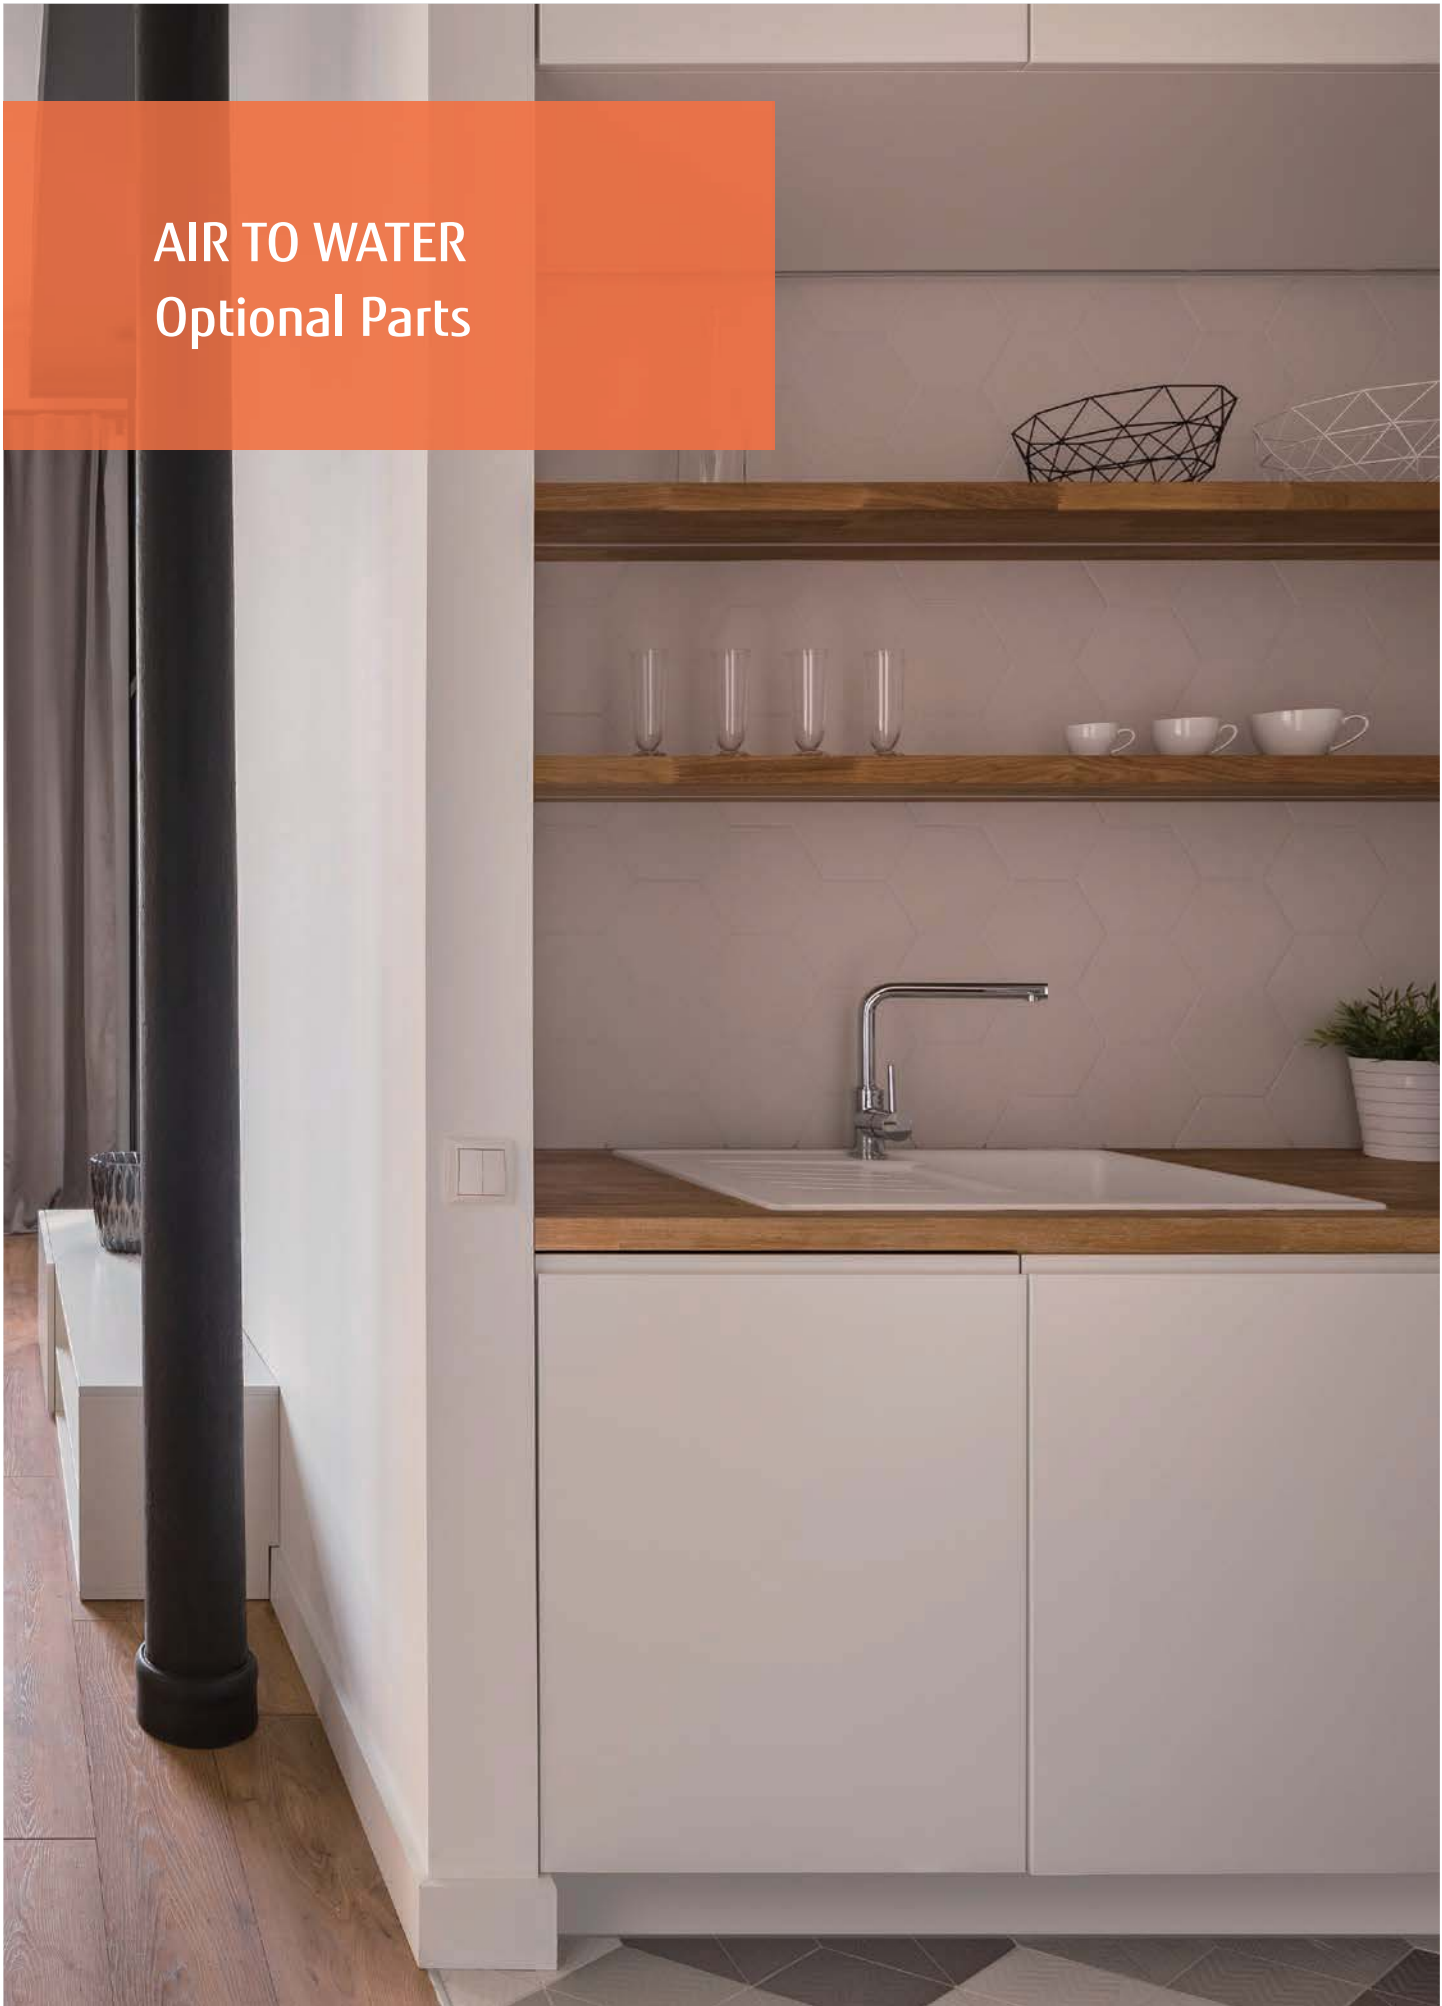














Series	Capacity range (kW)	Pipe diameter (Liquid/Gas) (mm)	H1 (m)	H2 (m)	L (m)
R32 Comfort	5	6.35/12.70	+20	-20	5-30
	6				
	8				
Comfort	5	6.35/12.70	+20	-20	5-30
	6				
	8	6.35/15.88			
	10				
High power	11	9.52/15.88	+15	-15	5-20
	14				
	16				
Super High power	15	9.52/15.88	+15	-25	5-30
	16				
	17				



















AIR TO WATER Optional Parts



Optional Parts

Product Name		Model Name	Split																Split DHW integrated type															
			Super High Power			High Power				R32 Comfort				Comfort				Super High Power			High Power				R32 Comfort				Comfort					
			10	30		10	30		10	30		10	30		10	30		10	30		10	30		10	30		10	30						
			16	15	17	11	14	11	14	16	5	6	8	5	6	8	10	16	15	17	11	14	11	14	16	5	6	8	5	6	8	10		
2nd Circuit Kit		UTW-KZSXE	—	—	—	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
		UTW-KZDXE	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●	●	●	●	●	●	●	●	●				
		UTW-KZSXJ	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
		UTW-KZDXJ	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	—	—				
Boiler Connection Kit		UTW-KBSXD	—	—	—	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
		UTW-KBDXD	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●	●	●	●	●	●	●	●	●				
	WH 	UTW-KBSXJ	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	DUO 		—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	—	—				
Balancing Vessel		UTW-TEVXA	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
DHW Kit		UTW-KDWXD (External)	●	●	●	●	●	●	●	●	●	●	●	●	●	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1				
DHW Tank	200 Liter 	UTW-T20AXH	●	●	●	●	●	●	●	●	●	●	●	●	●	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1				
	300 Liter 	UTW-T30AXH	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
DHW Tank	200 Liter 	UTW-T20BXH	●	●	●	●	●	●	●	●	●	●	●	●	●	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1	—*1				
	300 Liter 	UTW-T30BXH	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
DHW expansion kit		UTW-KDEXE	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●	●	●	●	●	—	—	—	—	●	●	●	●			
		UTW-KDEXL	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—				
Circulating Pump		UTW-PHFXG	●	●	●	●	●	●	●	—	—	—	—	—	—	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—				
Swimming Pool Kit		UTW-KSPXD	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
Heat Exchanger for Swimming Pool Kit		UTW-ESPXA	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
Cooling Kit		UTW-KCLXD	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—				
		UTW-KCLXL	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—			
Low Noise Kit		UTW-KLNXE	●	●	●	●	●	●	●	—	—	—	—	—	—	—	●	●	●	●	●	●	●	—	—	—	—	—	—	—				
Regulation Extension Kit		UTW-KREXD	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				

Product Name		Model Name	Split												Split DHW integrated type																
			Super High Power			High Power			R32 Comfort			Comfort			Super High Power			High Power			R32 Comfort			Comfort							
			10	30		10	30		10			10			10	30		10	30		10			10							
			16	15	17	11	14	11	14	16	5	6	8	5	6	8	10	16	15	17	11	14	11	14	16	5	6	8	5	6	8
Drain Pan		UTW-KDPXA	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		UTW-KDPXB	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—
Cascade Master Kit (incl. LPB Clip)		UTW-KCMXE	—	—	—	—	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Cascade Slave Kit (incl. LPB Clip)		UTW-KCSXE	—	—	—	—	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
HMI Kit		UTW-KHMXE*2	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Remote Controller	Wired 	UTW-C74TXF*2	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		UTW-C74HXF*2	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Room Thermostat	Wired 	UTW-C55XA	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Wireless 	UTW-C58XD	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Outdoor Sensor Transmitter		UTW-MOSXD	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
RF Modules for BSB-Port		UTW-MRCXD	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Web Server		UTW-KW1XD UTW-KW4XD	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LPB Clip		UTW-KL1XD	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
MODBUS Clip		UTW-KMBXJ	●*5	●*5	●*5	—	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5
Service Tool (incl. OCI700 Adapter)		UTW-KSTXD	●*3	●*3	●*3	—	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3
Service Tool Software		UTW-KPSXD	●*4	●*4	●*4	—	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4
External Connect Kit		UTY-XWZXZ2	—	—	—	—	●	●	●	●	—	—	—	—	—	—	—	—	—	●	●	●	●	—	—	—	—	—	—	—	—
		UTY-XWZXZ3	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	—	—
Electrical back-up heater relay		UTW-KBHXL	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—

*1: DHW operation is possible without DHW Kit and DHW Tank.
*2: 19 Languages included, no separate Eastern European RC necessary. C74TXF: Built in Room Temperature sensor C74HXF: Built in Room temperature and Humidity sensor
*3: UTW-KL1XD is required for the connection.
*4: UTW-KW1XD or UTW-KW4XD is required for the connection.
*5: Additional optional parts necessary.

● : Available — : Not Available