


AIR JACK pneumatic jacks consist of a high-strength diaphragm and an internal telescopic guide. They are equipped with a limit stop device and a safety valve that make them absolutely reliable in the event of overloading. Quiet, simple and lightweight, they are the ideal product for mechanical and Body repair shops.

AIR JACK CAR 2T


Ref. 058323

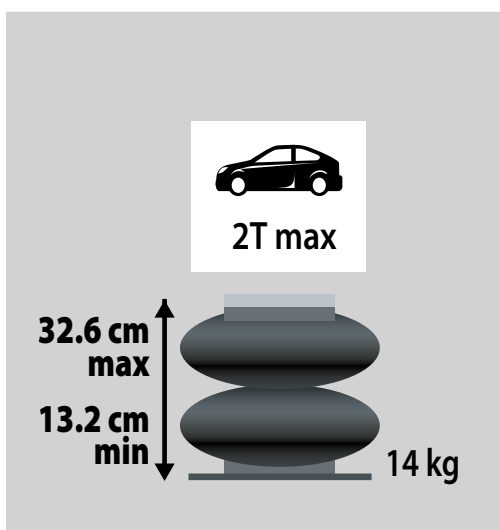

Capacity	2 Tons
Net weight	14 Kg
Supply pressure	8-10 bar
Air consumption	100 nl/min
Max. stroke	194 mm
Min. height	132 mm
Number of pistons	2

AIR JACK VAN 2T

Ref. 058330

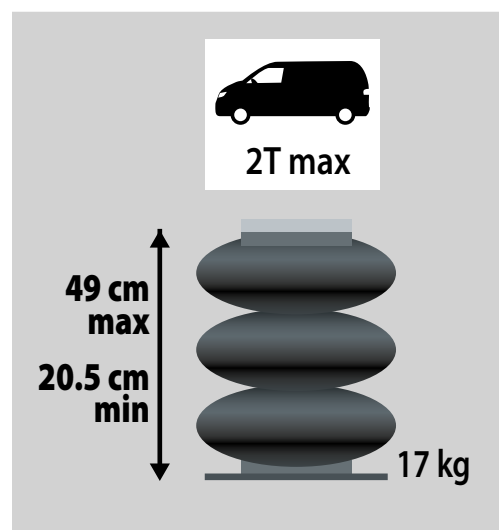

Capacity	2 Tons
Net weight	17 Kg
Supply pressure	8-10 bar
Air consumption	100 nl/min
Max. stroke	285 mm
Min. height	205 mm
Number of pistons	3